

RIS 60

Installation tray, perforated, heavy, height = 60 mm

The installation cable trays RIS 60 have sides 60 mm high and are available in tray widths from 50 to 300 mm. The standard length is 3000 mm. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.



steel, continuously hot galvanized/Sendzimir process

Products	H	B	L	t	A	Q _{SK}	W
RIS 60-05S	60 mm	50 mm	3000 mm	1,50 mm	27 cm ²	0,04 kN/m	5,000 kg
RIS 60-10S	60 mm	100 mm	3000 mm	1,50 mm	56 cm ²	0,09 kN/m	6,800 kg
RIS 60-15S	60 mm	150 mm	3000 mm	1,50 mm	85 cm ²	0,13 kN/m	8,400 kg
RIS 60-20S	60 mm	200 mm	3000 mm	1,50 mm	113 cm ²	0,17 kN/m	9,100 kg
RIS 60-30S	60 mm	300 mm	3000 mm	1,50 mm	171 cm ²	0,26 kN/m	13,000 kg

steel, batch/hot-dip galvanized

Products	H	B	L	t	A	Q _{SK}	W
RIS 60-05F	60 mm	50 mm	3000 mm	1,50 mm	27 cm ²	0,04 kN/m	5,640 kg
RIS 60-10F	60 mm	100 mm	3000 mm	1,50 mm	56 cm ²	0,09 kN/m	7,227 kg
RIS 60-15F	60 mm	150 mm	3000 mm	1,50 mm	85 cm ²	0,13 kN/m	9,116 kg
RIS 60-20F	60 mm	200 mm	3000 mm	1,50 mm	113 cm ²	0,17 kN/m	10,056 kg
RIS 60-30F	60 mm	300 mm	3000 mm	1,50 mm	171 cm ²	0,26 kN/m	13,835 kg

H: height

B: width

L: length

t: material thickness

A: cross section area


Q_{SK}: distributed load control cable



PRODUCT INFORMATION

W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

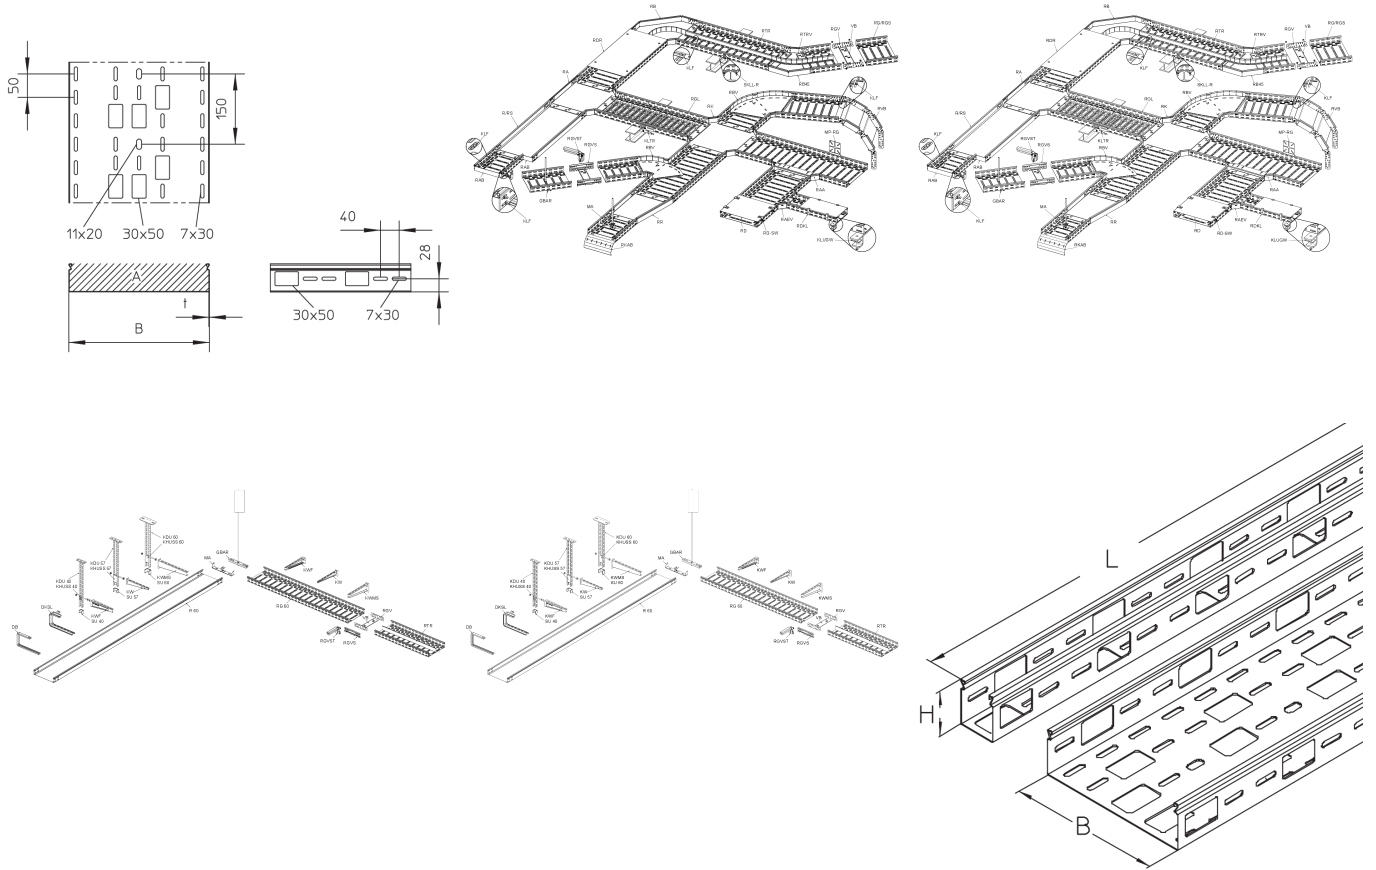

OPTIONAL ACCESSORIES

RID, RIDR, RDS, RDSR, RIK 60, RIB 60, RIA 60, RITR 60, RIV 60, VB, REB, KSR 50, SRI 60, AHB, RKAB

