


RK 110

Cable tray crossing, height = 110 mm

The cable tray crossing RK 110 enables the connection of four cable trays to allow the direction of cable routing to be changed horizontally. It has integrated side connectors and is pushed into the cable tray along with VB floor connectors and bolted in place. The cable tray crossing RK 110 is suitable for cable trays with sides 110 mm high. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

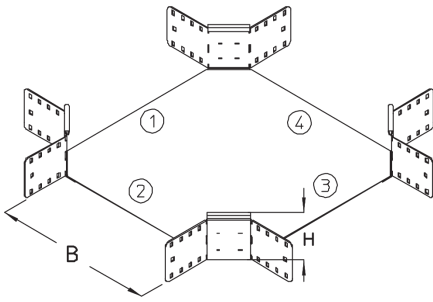

steel, continuously hot galvanized/Sendzimir process

Products	H	B	weight
RK 110-10S	110 mm	100 mm	2,647 kg
incl.:			
8 × KLR			
RK 110-20S	110 mm	200 mm	3,166 kg
incl.:			
8 × KLR			
RK 110-30S	110 mm	300 mm	3,880 kg
incl.:			
8 × KLR			
RK 110-40S	110 mm	400 mm	4,791 kg
incl.:			
8 × KLR			
RK 110-50S	110 mm	500 mm	5,897 kg
incl.:			
8 × KLR			
RK 110-60S	110 mm	600 mm	7,200 kg
incl.:			
8 × KLR			



PRODUCT INFORMATION

steel, batch/hot-dip galvanized

Products	H	B	weight
RK 110-10F	110 mm	100 mm	2,840 kg
incl.: 8 × KLR E			
RK 110-20F	110 mm	200 mm	3,396 kg
incl.: 8 × KLR E			
RK 110-30F	110 mm	300 mm	4,160 kg
incl.: 8 × KLR E			
RK 110-40F	110 mm	400 mm	5,135 kg
incl.: 8 × KLR E			
RK 110-50F	110 mm	500 mm	6,318 kg
incl.: 8 × KLR E			
RK 110-60F	110 mm	600 mm	7,712 kg
incl.: 8 × KLR E			

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	B	weight
RK 110-10E	110 mm	100 mm	2,218 kg
incl.: 8 × KLR E			
RK 110-20E	110 mm	200 mm	2,739 kg
incl.: 8 × KLR E			
RK 110-30E	110 mm	300 mm	3,458 kg
incl.: 8 × KLR E			
RK 110-40E	110 mm	400 mm	4,359 kg

Page 2



PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Telefon: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com




PRODUCT INFORMATION

Products	H	B	weight
incl.: 8 × KLR E			
RK 110-50E	110 mm	500 mm	5,465 kg
incl.: 8 × KLR E			
RK 110-60E	110 mm	600 mm	6,768 kg
incl.: 8 × KLR E			

H: height
B: width

DETAIL AND APPLICATION IMAGES

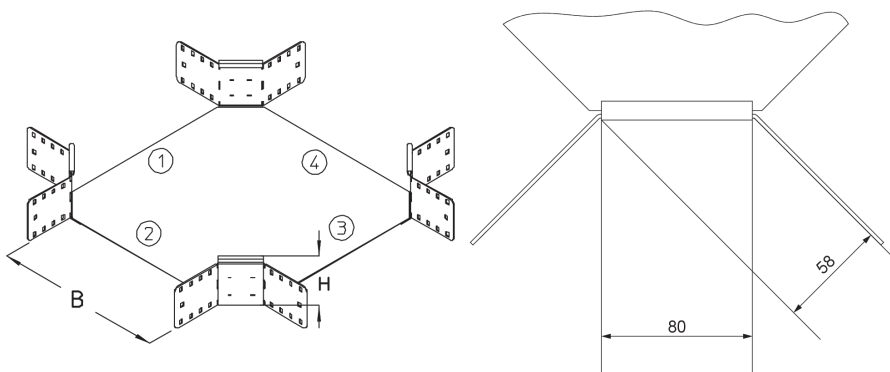

OPTIONAL ACCESSORIES

RKD, RKDR, VB, RTRV 110

