


RK 60

Cable tray crossing, height = 60 mm

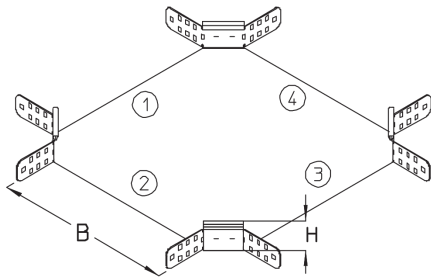

The cable tray crossing RK 60 enables the connection of four cable trays to allow the direction of cable routing to be changed horizontally. It has integrated side connectors and is pushed into the cable tray along with VB floor connectors and bolted in place. The cable tray crossing RK 60 is suitable for cable trays with sides 60 mm high. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

steel, continuously hot galvanized/Sendzimir process

Products	H	B	W
RK 60-10S	60 mm	100 mm	1,383 kg
incl.:			
4 × KLR			
RK 60-20S	60 mm	200 mm	1,902 kg
incl.:			
4 × KLR			
RK 60-30S	60 mm	300 mm	2,616 kg
incl.:			
4 × KLR			
RK 60-40S	60 mm	400 mm	3,527 kg
incl.:			
4 × KLR			
RK 60-50S	60 mm	500 mm	4,633 kg
incl.:			
4 × KLR			
RK 60-60S	60 mm	600 mm	5,936 kg
incl.:			
4 × KLR			



PRODUCT INFORMATION

steel, batch/hot-dip galvanized

Products	H	B	W
RK 60-10F	60 mm	100 mm	1,484 kg
incl.: 4 × KLR E			
RK 60-20F	60 mm	200 mm	2,039 kg
incl.: 4 × KLR E			
RK 60-30F	60 mm	300 mm	2,803 kg
incl.: 4 × KLR E			
RK 60-40F	60 mm	400 mm	3,778 kg
incl.: 4 × KLR E			
RK 60-50F	60 mm	500 mm	4,961 kg
incl.: 4 × KLR E			
RK 60-60F	60 mm	600 mm	6,356 kg
incl.: 4 × KLR E			

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	B	W
RK 60-10E	60 mm	100 mm	1,238 kg
incl.: 4 × KLR E			
RK 60-20E	60 mm	200 mm	1,759 kg
incl.: 4 × KLR E			
RK 60-30E	60 mm	300 mm	2,478 kg
incl.: 4 × KLR E			
RK 60-40E	60 mm	400 mm	3,379 kg

Page 2



PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Telefon: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com




PRODUCT INFORMATION

Products	H	B	W
incl.: 4 × KLR E			
RK 60-50E	60 mm	500 mm	4,485 kg
incl.: 4 × KLR E			
RK 60-60E	60 mm	600 mm	5,788 kg
incl.: 4 × KLR E			

H: height
B: width
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

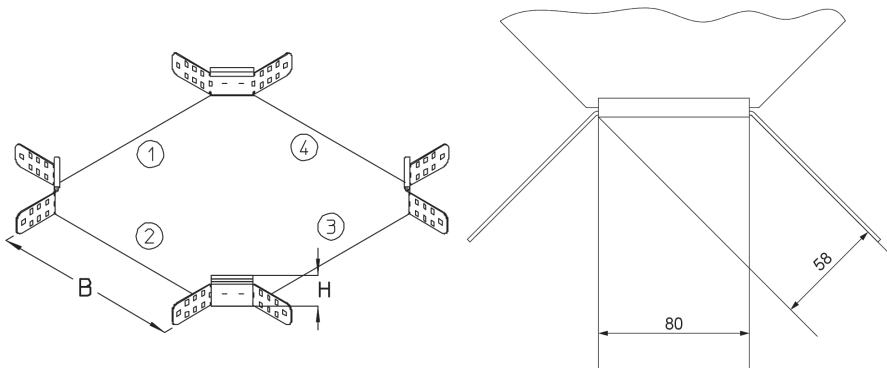

OPTIONAL ACCESSORIES

RKD, RKDR, VB, RTRV 60

