


RM

DIN 582 ring nuts

RM ring nuts according to DIN 582 are used to securely fix particularly heavy loads mainly during transport. They are available in threads M8 to M20 and are made of galvanised or untreated steel. They can bear loads of up to 16 kN.

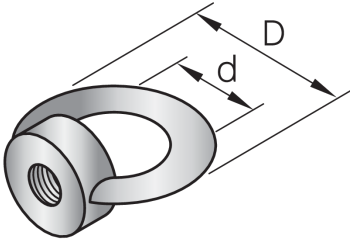

Products	weight
RM10 GV	0,091 kg
RM10 R	0,091 kg
RM12 GV	0,150 kg
RM12 R	0,150 kg
RM16 GV	0,251 kg
RM16 R	0,251 kg
RM20 GV	0,377 kg
RM20 R	0,377 kg
RM8 GV	0,047 kg
RM8 R	0,047 kg

DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

