

RS 110

Cable tray, unperforated, heavy, height = 110 mm

RS 110 unperforated cable trays have sides 110 mm high and are available in widths from 100 to 600 mm. The standard length is 3000 mm. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.



steel, continuously hot galvanized/Sendzimir process

Products	H	B	L	t	A	Q _{SK}	W
RS 110-10S	110 mm	100 mm	3000 mm	1,50 mm	107 cm ²	0,16 kN/m	12,600 kg
RS 110-20S	110 mm	200 mm	3000 mm	1,50 mm	217 cm ²	0,33 kN/m	15,895 kg
RS 110-30S	110 mm	300 mm	3000 mm	1,50 mm	327 cm ²	0,49 kN/m	19,125 kg
RS 110-40S	110 mm	400 mm	3000 mm	1,50 mm	437 cm ²	0,66 kN/m	23,200 kg
RS 110-50S	110 mm	500 mm	3000 mm	1,50 mm	547 cm ²	0,82 kN/m	26,000 kg
RS 110-60S	110 mm	600 mm	3000 mm	1,50 mm	657 cm ²	0,99 kN/m	29,900 kg

steel, batch/hot-dip galvanized

Products	H	B	L	t	A	Q _{SK}	W
RS 110-10F	110 mm	100 mm	3000 mm	1,50 mm	107 cm ²	0,16 kN/m	13,264 kg
RS 110-20F	110 mm	200 mm	3000 mm	1,50 mm	217 cm ²	0,33 kN/m	17,010 kg
RS 110-30F	110 mm	300 mm	3000 mm	1,50 mm	327 cm ²	0,49 kN/m	19,800 kg
RS 110-40F	110 mm	400 mm	3000 mm	1,50 mm	437 cm ²	0,66 kN/m	24,503 kg
RS 110-50F	110 mm	500 mm	3000 mm	1,50 mm	547 cm ²	0,82 kN/m	28,149 kg
RS 110-60F	110 mm	600 mm	3000 mm	1,50 mm	657 cm ²	0,99 kN/m	31,996 kg


H: height
B: width
L: length



PRODUCT INFORMATION

t: material thickness
A: cross section area
Q_{SK}: distributed load control cable
W: Weight per storage unit


DETAIL AND APPLICATION IMAGES

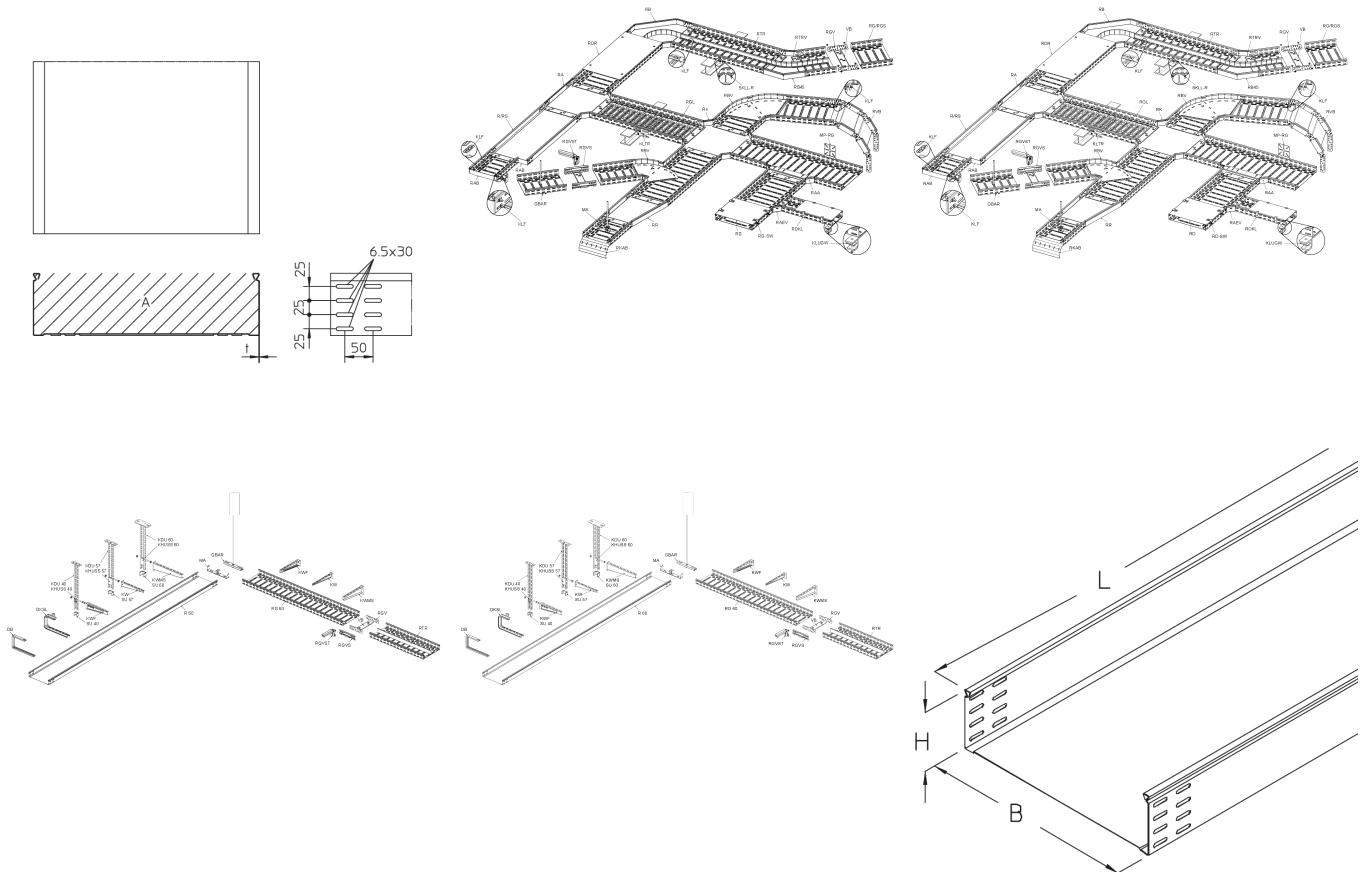

LOAD DIAGRAM



PRODUCT INFORMATION

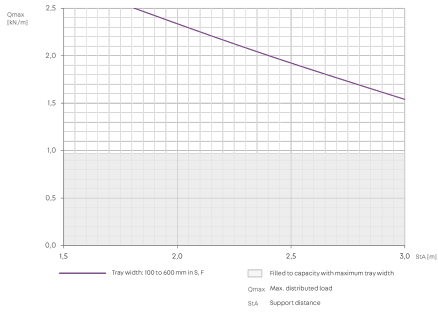

OPTIONAL ACCESSORIES

RD, RDR, RDS, RDSR, RB 110, RB45 110, RBV 110, RAE 110, RAA 110, RA 110, RK 110, RVB 110, RR 110, RAB 110, REB, RGV 110, VB, RTR 110

