


RTR 60

Cable tray separating strip, height = 50 mm

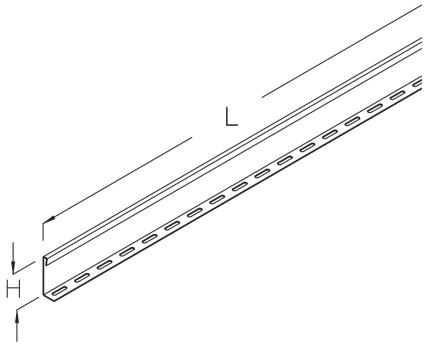

Cables and lines with different functions or voltages can be routed separately from one another in the same cable tray using the cable tray separating strip RTR 60. The separating strip is bolted to the cable tray three times or fastened with KLF approx. 100 mm away from both ends of the separating strip and in the middle. The cable tray separating strip is 50 mm high and 3000 mm long. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

steel, continuously hot galvanized/Sendzimir process

Products	H	L	W
RTR 60S	50 mm	3000 mm	1,528 kg
incl.:			
3 × KLR			

steel, batch/hot-dip galvanized

Products	H	L	W
RTR 60F	50 mm	3000 mm	1,634 kg
incl.:			
3 × KLR E			

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	L	W
RTR 60E	50 mm	3000 mm	2,046 kg
incl.:			
3 × KLR E			




PRODUCT INFORMATION

Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11

Products	H	L	W
RTR 60E4	50 mm	3000 mm	2,074 kg
incl.:			
3 × KLR E			

H: height
L: length
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

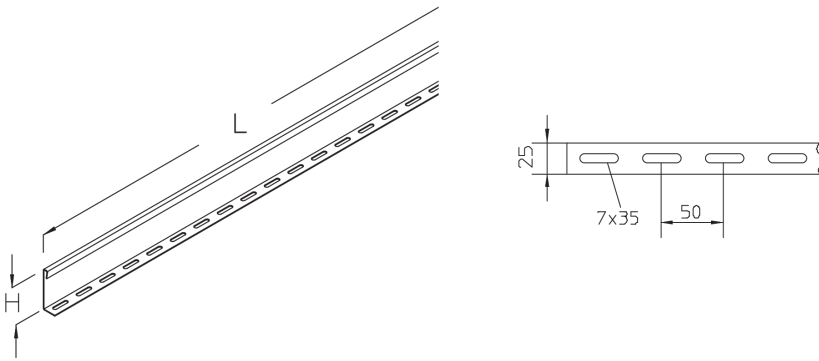

OPTIONAL ACCESSORIES

KLF

