


RTRV 60

Cable tray separating strip, variable, height = 50 mm

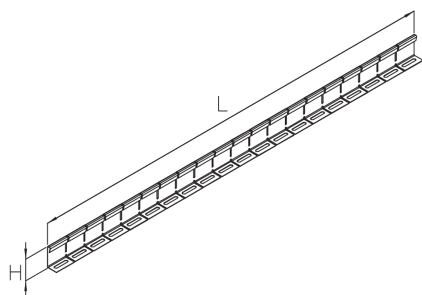

Cables and wires with different functions or voltages can be routed separately from one another using the variable cable tray separating strip RTRV 60. The separating strip is separated into segments. This makes it flexible and ideal for being installed in formed parts. Mounting bolts are included. The cable tray separating strip RTRV 60 is 50 mm high and 1000 mm long. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

steel, continously hot galvanized/Sendzimir process

Products	H	L	t	W
RTRV 60S	50 mm	1000 mm	0,75 mm	0,502 kg
incl.: 3 × FRSV 6X12, 3 × SEMS 6				

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	L	t	W
RTRV 60E	50 mm	1000 mm	0,80 mm	0,540 kg
incl.: 3 × SEMS 6E, 3 × FRSV 6X12E				

Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11


Products	H	L	t	W
RTRV 60E4	50 mm	1000 mm	0,80 mm	0,551 kg
incl.: 3 × FRSV 6X12E4, 3 × SEM 6E4, 3 × US 6X12E4				



PRODUCT INFORMATION

H: height
L: length
t: material thickness
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

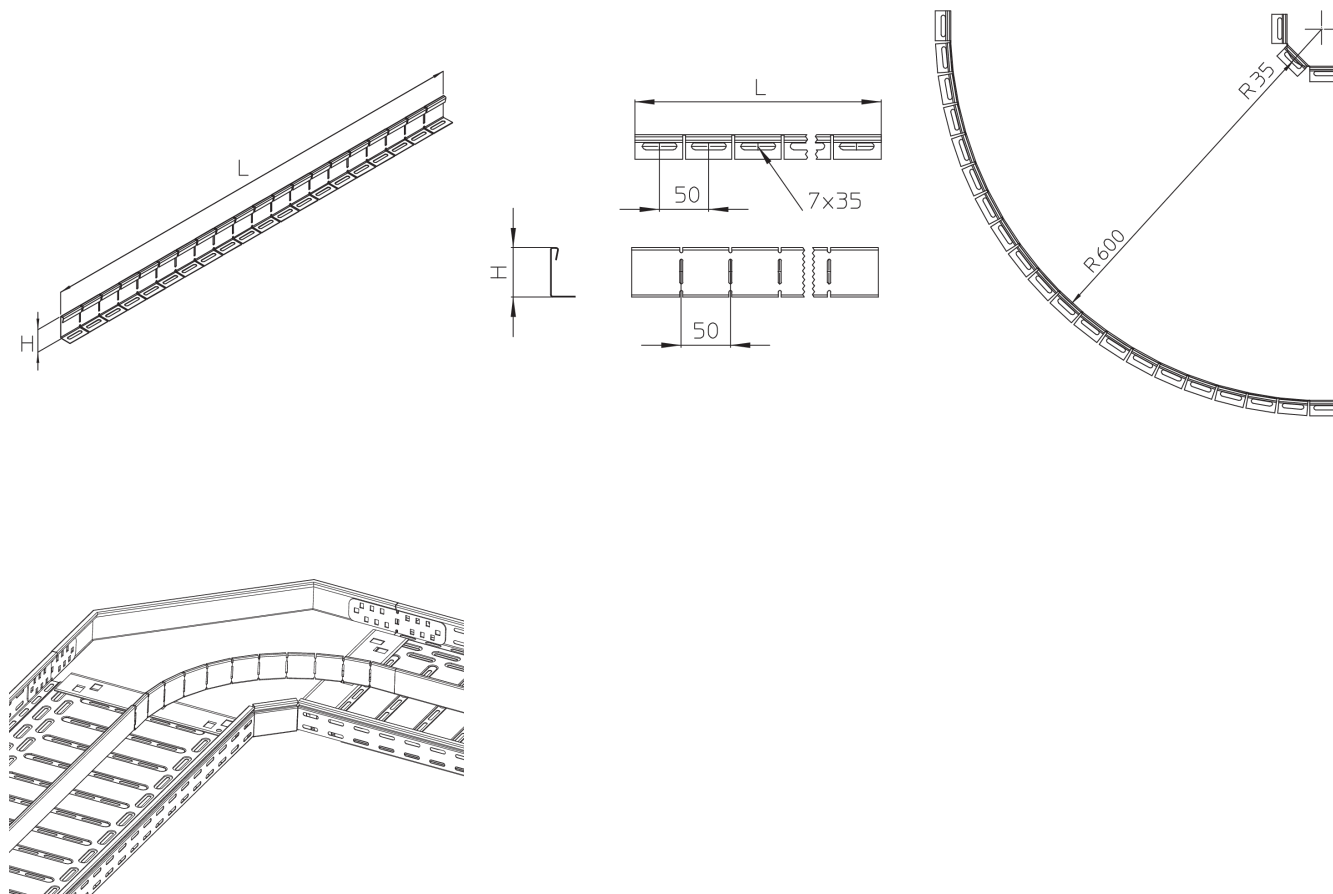

OPTIONAL ACCESSORIES

KLF

