


RTRV 85

Cable tray separating strip, variable, height = 80 mm

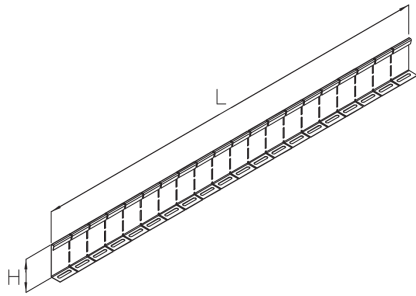

Cables and wires with different functions or voltages can be routed separately from one another using the variable cable tray separating strip RTRV 85. The separating strip is separated into segments. This makes it flexible and ideal for being installed in formed parts. Mounting bolts are included. The cable tray separating strip RTRV 85 is 80 mm high and 1000 mm long. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

steel, continuously hot galvanized/Sendzimir process

| Products | H | L | t | weight |
|---------------------------|-------|---------|---------|----------|
| RTRV 85S | 80 mm | 1000 mm | 0,75 mm | 0,671 kg |
| incl.: | | | | |
| 3 × FRSV 6X12, 3 × SEMS 6 | | | | |

Stainless steel, according to ASTM 304 / BS 304 S 3

| Products | H | L | t | weight |
|-----------------------------|-------|---------|---------|----------|
| RTRV 85E | 80 mm | 1000 mm | 0,80 mm | 0,722 kg |
| incl.: | | | | |
| 3 × FRSV 6X12E, 3 × SEMS 6E | | | | |

Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11


| Products | H | L | t | weight |
|---|-------|---------|---------|----------|
| RTRV 85E4 | 80 mm | 1000 mm | 0,80 mm | 0,734 kg |
| incl.: | | | | |
| 3 × FRSV 6X12E4, 3 × SEM 6E4, 3 × US 6X12E4 | | | | |



PRODUCT INFORMATION

H: height
L: length
t: material thickness

DETAIL AND APPLICATION IMAGES

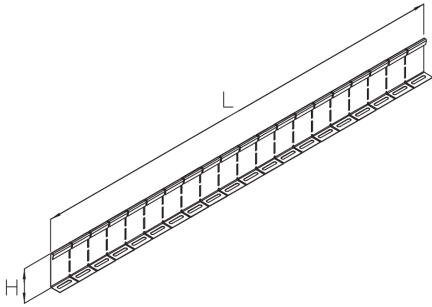

OPTIONAL ACCESSORIES

KLF

