


SD-BS

Expansion anchor, fire protection

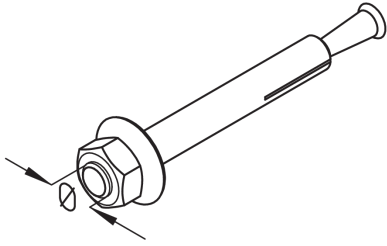

The expansion anchor SD-BS is used to fasten supporting structures such as bracket holders or wall brackets to walls and/or ceilings. It is permitted to be used as a single attachment in cracked and non-cracked standard concrete with strength $\geq C20/25$. The manufacturer's specifications must be observed. The pre-assembled washer makes the expansion anchor suitable for fastening steel attachments with slots.

steel, galvanic zinc plated

Products	\varnothing	L_{\min}	P_{Zug}	W
SD-BS 6/5	6 mm	36 mm	2,4 kN	0,014 kg

\varnothing : thread diameter

L_{\min} : min. borehole depth

P_{Zug} : max. permissible tensile force

W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

