


## SD-BS

Expansion anchor, fire protection



The expansion anchor SD-BS is used to fasten supporting structures such as bracket holders or wall brackets to walls and/or ceilings. It is permitted to be used as a single attachment in cracked and non-cracked standard concrete with strength  $\geq C20/25$ . The manufacturer's specifications must be observed (ETA-19/0520). The pre-assembled washer makes the expansion anchor suitable for fastening steel attachments with slots.

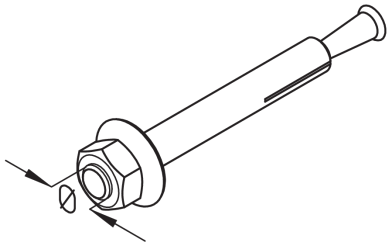

steel, galvanic zinc plated


Products	$\varnothing$	$L_{\min}$	$P_{\text{Zug}}$	weight
SD-BS 6/5	6 mm	36 mm	2,4 kN	0,014 kg

$\varnothing$ : thread diameter

$L_{\min}$ : min. borehole depth

$P_{\text{Zug}}$ : max. permissible tensile force

## DETAIL AND APPLICATION IMAGES

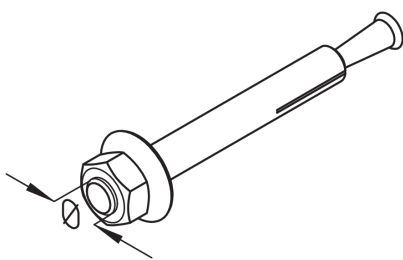

, ETA-19/0520

