


SKL

Ship cable ladder, height = 30 mm

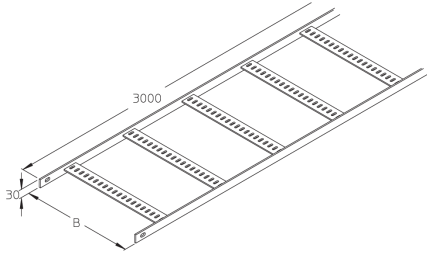

SKL ship cable ladders with perforated and welded rungs have rails 30 mm high and are available in widths of 75 to 500 mm and in lengths of 3000 mm. We provide components in various materials and surface finishes to ensure that a wide range of corrosion requirements are met and that additional protective measures can be taken.

coated

Products	H	B	L	W
SKL 075M	30 mm	75 mm	3000 mm	8,400 kg
SKL 100M	30 mm	100 mm	3000 mm	8,900 kg
SKL 150M	30 mm	150 mm	3000 mm	9,700 kg
SKL 200M	30 mm	200 mm	3000 mm	10,600 kg
SKL 250M	30 mm	250 mm	3000 mm	11,400 kg
SKL 300M	30 mm	300 mm	3000 mm	12,300 kg
SKL 400M	30 mm	400 mm	3000 mm	14,000 kg
SKL 500M	30 mm	500 mm	3000 mm	15,700 kg

steel, bright rolled

Products	H	B	L	W
SKL 075B	30 mm	75 mm	3000 mm	8,400 kg
SKL 100B	30 mm	100 mm	3000 mm	8,900 kg
SKL 150B	30 mm	150 mm	3000 mm	9,700 kg
SKL 200B	30 mm	200 mm	3000 mm	10,600 kg
SKL 250B	30 mm	250 mm	3000 mm	11,400 kg
SKL 300B	30 mm	300 mm	3000 mm	12,300 kg
SKL 400B	30 mm	400 mm	3000 mm	14,000 kg
SKL 500B	30 mm	500 mm	3000 mm	15,700 kg




PRODUCT INFORMATION

steel, batch/hot-dip galvanized

Products	H	B	L	W
SKL 075F	30 mm	75 mm	3000 mm	8,400 kg
SKL 100F	30 mm	100 mm	3000 mm	8,900 kg
SKL 150F	30 mm	150 mm	3000 mm	9,700 kg
SKL 200F	30 mm	200 mm	3000 mm	10,600 kg
SKL 250F	30 mm	250 mm	3000 mm	11,400 kg
SKL 300F	30 mm	300 mm	3000 mm	12,300 kg
SKL 400F	30 mm	400 mm	3000 mm	14,000 kg
SKL 500F	30 mm	500 mm	3000 mm	15,700 kg


H: height
B: width
L: length
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

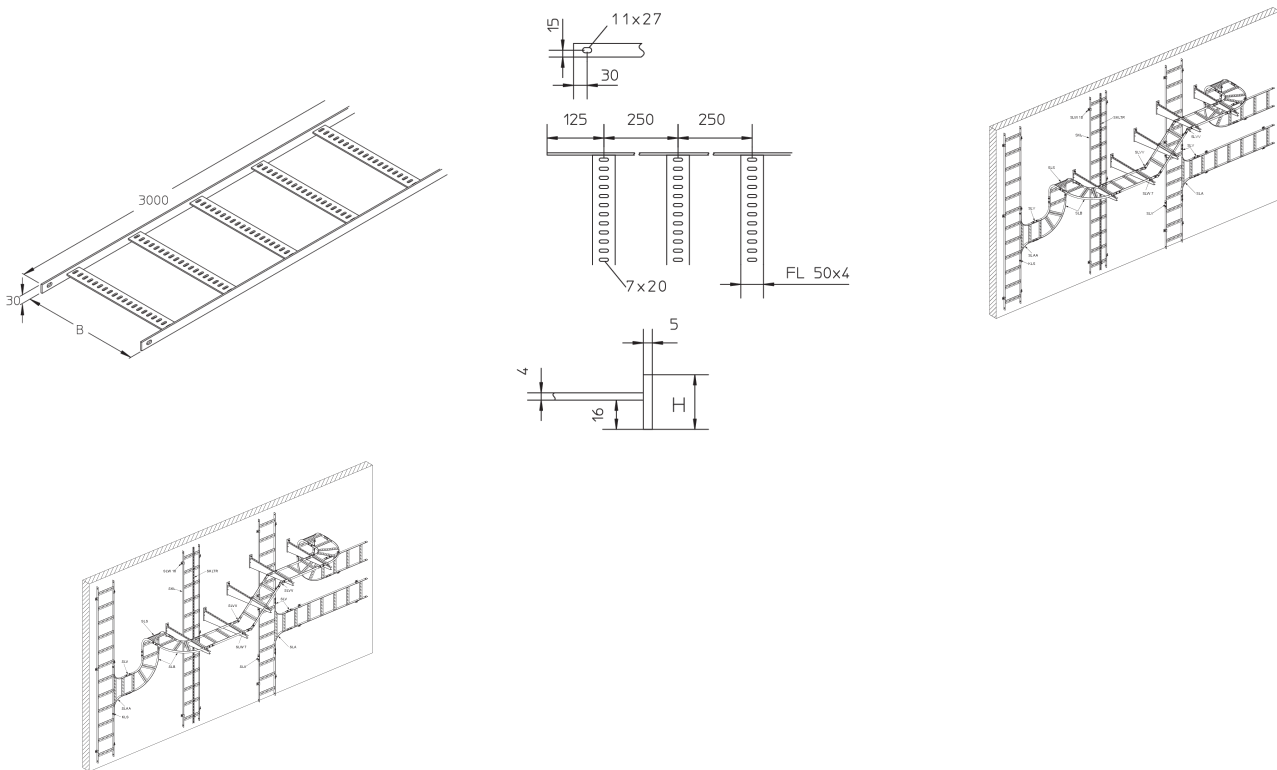

PRODUCT INFORMATION

LOAD DIAGRAM

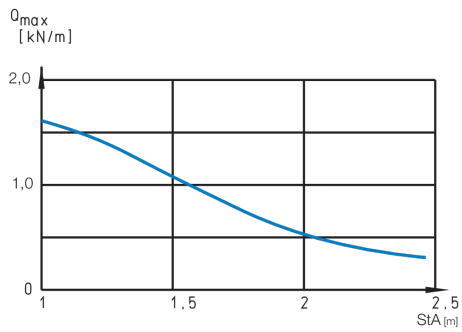

OPTIONAL ACCESSORIES

SLW, SLV, SLVV

