


SLA

Ship cable ladder branch, height = 30 mm

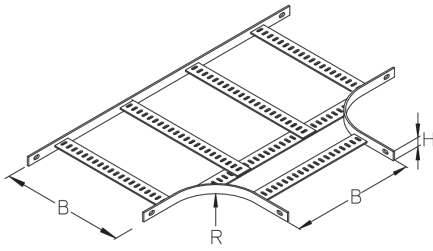

The T-shaped ship cable ladder branch SLA allows the direction of cable routing to be changed in the form of a branch. It is inserted between two ship cable ladders and allows another ship cable ladder to be connected at right angles. The connection is made using SLV connectors. The branch is suitable for ship cable ladders with rails 30 mm high and is 75 to 500 mm wide. We provide components in various materials and surface finishes to ensure that a wide range of corrosion requirements are met and that additional protective measures can be taken.

coated

Products	H	B	B2	R	W
SLA 075M	30 mm	75 mm	75 mm	100 mm	2,260 kg
SLA 100M	30 mm	100 mm	100 mm	100 mm	2,470 kg
SLA 150M	30 mm	150 mm	150 mm	100 mm	2,900 kg
SLA 200M	30 mm	200 mm	200 mm	100 mm	3,300 kg
SLA 250M	30 mm	250 mm	250 mm	100 mm	3,720 kg
SLA 300M	30 mm	300 mm	300 mm	150 mm	4,500 kg
SLA 400M	30 mm	400 mm	400 mm	150 mm	5,330 kg
SLA 500M	30 mm	500 mm	500 mm	200 mm	6,600 kg

steel, bright rolled

Products	H	B	B2	R	W
SLA 075B	30 mm	75 mm	75 mm	100 mm	2,260 kg
SLA 100B	30 mm	100 mm	100 mm	100 mm	2,470 kg
SLA 150B	30 mm	150 mm	150 mm	100 mm	2,900 kg
SLA 200B	30 mm	200 mm	200 mm	100 mm	3,300 kg
SLA 250B	30 mm	250 mm	250 mm	100 mm	3,720 kg
SLA 300B	30 mm	300 mm	300 mm	150 mm	4,500 kg
SLA 400B	30 mm	400 mm	400 mm	150 mm	5,330 kg
SLA 500B	30 mm	500 mm	500 mm	200 mm	6,600 kg




PRODUCT INFORMATION


steel, batch/hot-dip galvanized

Products	H	B	B2	R	W
SLA 075F	30 mm	75 mm	75 mm	100 mm	2,260 kg
SLA 100F	30 mm	100 mm	100 mm	100 mm	2,470 kg
SLA 150F	30 mm	150 mm	150 mm	100 mm	2,900 kg
SLA 200F	30 mm	200 mm	200 mm	100 mm	3,300 kg
SLA 250F	30 mm	250 mm	250 mm	100 mm	3,720 kg
SLA 300F	30 mm	300 mm	300 mm	100 mm	4,500 kg
SLA 400F	30 mm	400 mm	400 mm	150 mm	5,330 kg
SLA 500F	30 mm	500 mm	500 mm	200 mm	6,600 kg

H: height
B: width
B2: width
R: radius
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

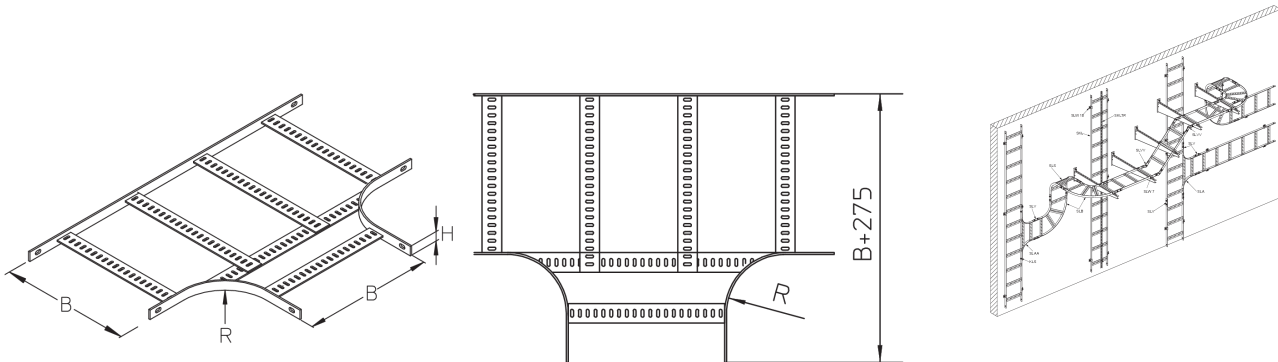



OPTIONAL ACCESSORIES

SLW, SLV, SLVV

