


## SR

Protective tube, length = 6000 mm

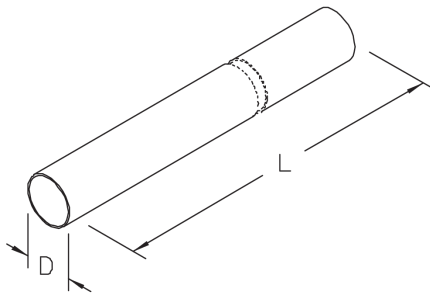

The protective tube SR is used to route cables in and out through cable trays and ladders safely and gently. It is 6000 mm long and either 30 or 60 mm in diameter. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

steel, batch/hot-dip galvanized

Products	L	D	t	weight
SR 30F	6000 mm	30 mm	1,50 mm	6,650 kg
SR 60F	6000 mm	60 mm	2,00 mm	17,400 kg


Stainless steel, according to ASTM 304 / BS 304 S 3

Products	L	D	t	weight
SR 30E	6000 mm	30 mm	1,50 mm	6,650 kg
SR 60E	6000 mm	60 mm	2,00 mm	17,400 kg

L: length  
D: diameter  
t: material thickness

## DETAIL AND APPLICATION IMAGES



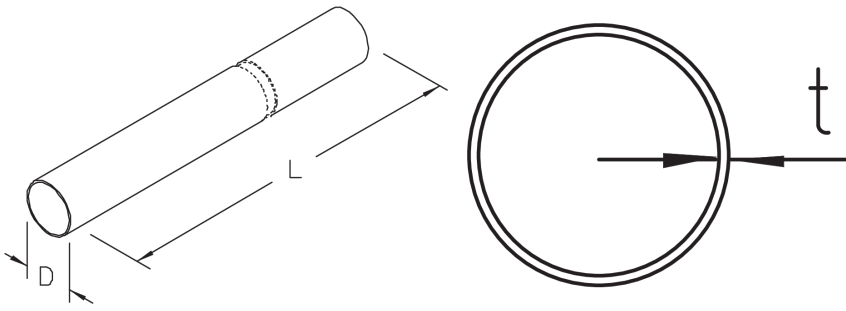

## OPTIONAL ACCESSORIES

SRM, SRML, SRF, SRFW, SRMP-C, SRMP-B, SRMP-A, SRS-W, SRS-B, SRS-A, SRS-R, SRB 45, SRB 90, SRHB, SRHD, SRK-O, SRK-G

