


SRL

Protective tube, slit, length = 6000 mm

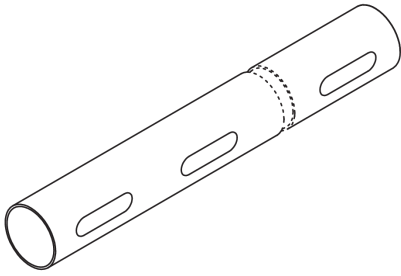

The protective tube SRL with slots is used to route cables in and out through cable trays and ladders safely and gently. It is 6000 mm long and 60 mm in diameter. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

steel, batch/hot-dip galvanized

Products	L	D	t	weight
SRL 60F	6000 mm	60 mm	2,00 mm	16,300 kg

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	L	D	t	weight
SRL 60E	6000 mm	60 mm	2,00 mm	16,300 kg

L: length
D: diameter
t: material thickness

OPTIONAL ACCESSORIES

SRM, SRML, SRF, SRFW, SRMP-C, SRMP-B, SRMP-A, SRS-W, SRS-B, SRS-A, SRS-R, SRB 45, SRB 90, SRHB, SRHD, SRK-O, SRK-G, SRL-KSR 100

