

## SRM

### Clamping sleeve

The clamping sleeve SRM is used to connect two protective tubes or protective tubes with tube bends. It is 80 or 115 mm high and 30 or 60 mm in diameter. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

steel, batch/hot-dip galvanized

Products	H	D	t	weight
SRM 30F	80 mm	30 mm	1,50 mm	0,150 kg
SRM 60F	115 mm	60 mm	2,50 mm	0,550 kg

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	D	t	weight
SRM 30E	80 mm	30 mm	1,50 mm	0,150 kg
SRM 60E	115 mm	60 mm	2,50 mm	0,550 kg


**H:** height

**D:** diameter

**t:** material thickness

## DETAIL AND APPLICATION IMAGES



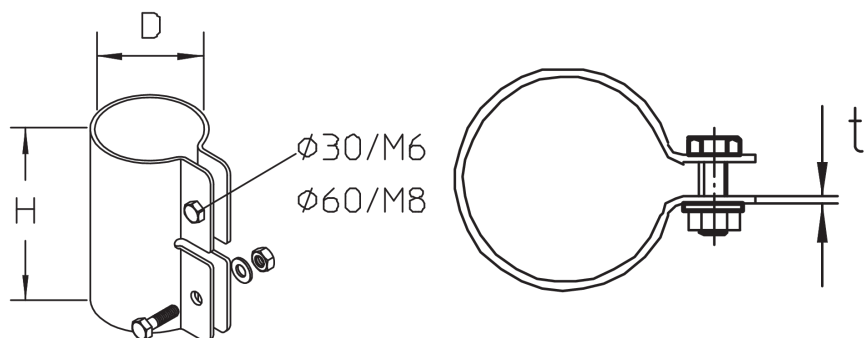

## OPTIONAL ACCESSORIES

SR, SRL, SRB 45, SRB 90

