


SSV

Countersunk screw, DIN 963

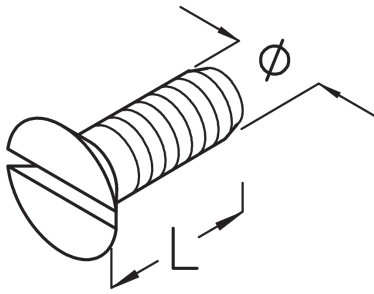

The countersunk screw SSV (in line with DIN 963) is available in lengths from 10 to 40 mm and with threads M6 and M8. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

steel, galvanic zinc plated

Products	Ø	L	weight
SSV 6X10	6 mm	10 mm	0,002 kg
SSV 6X25	6 mm	25 mm	0,005 kg
SSV 6X40	6 mm	40 mm	0,007 kg

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	Ø	L	weight
SSV 6X10E	6 mm	10 mm	0,002 kg
SSV 8X10E	8 mm	10 mm	0,005 kg

Ø: thread diameter
L: length

DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

