

STU 50-3E

Vertical ladder, isosceles U profile

STU 50-3E stainless steel vertical ladders consist of perforated side rails with U profiles and rungs made of profile rails 39.5x22 mm. They are designed for a maximum load of up to 2.00 kN, are 210 to 800 mm wide and are available in standard lengths of 3000 mm.

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	B	L	P _{max}	W
STU 50-02-3E	50 mm	200 mm	3000 mm	2,00 kN	9,213 kg
incl.:					
5 × STUS 50-02E					
STU 50-03-3E	50 mm	300 mm	3000 mm	2,00 kN	9,743 kg
incl.:					
5 × STUS 50-03E					
STU 50-04-3E	50 mm	400 mm	3000 mm	2,00 kN	10,328 kg
incl.:					
5 × STUS 50-04E					
STU 50-05-3E	50 mm	500 mm	3000 mm	2,00 kN	10,918 kg
incl.:					
5 × STUS 50-05E					
STU 50-06-3E	50 mm	600 mm	3000 mm	2,00 kN	11,503 kg
incl.:					
5 × STUS 50-06E					
STU 50-07-3E	50 mm	700 mm	3000 mm	2,00 kN	12,088 kg
incl.:					
5 × STUS 50-07E					
STU 50-08-3E	50 mm	800 mm	3000 mm	2,00 kN	12,678 kg
incl.:					
5 × STUS 50-08E					


Page 1



PRODUCT INFORMATION

H: height
B: width
L: length
P_{max}: maximum load
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

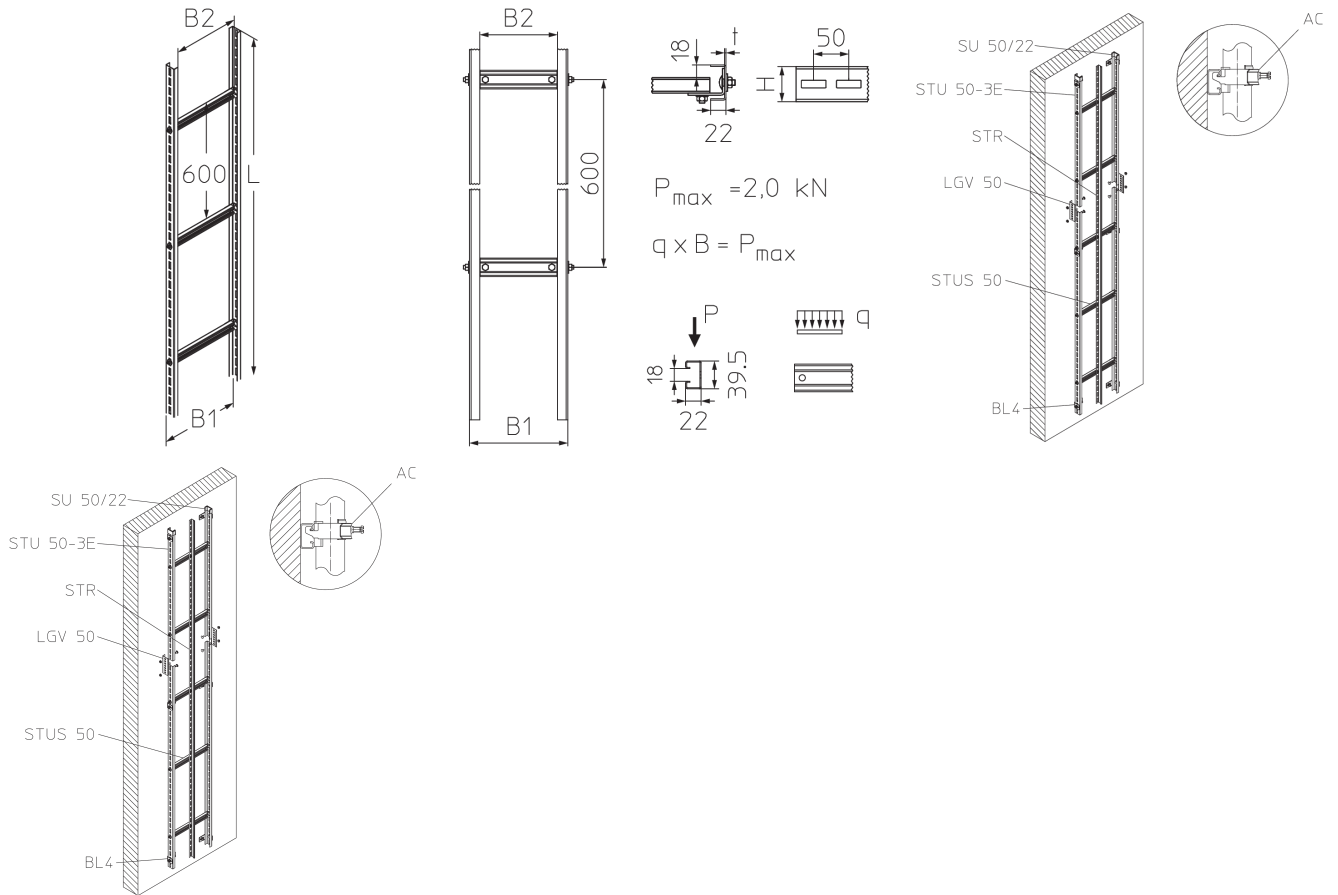

OPTIONAL ACCESSORIES

STUS 50, AC, LGV 50, STR 50, STR 110, STD-A, RD, BL 4, LH, SU 50/22, KZF, KZS

