

## STU 62

Vertical ladder, isosceles U profile

STU 62 vertical ladders consist of perforated side rails with U profiles and rungs made of 40x22 mm profile rails. They are designed for a maximum load of up to 4.00 kN, are 200 to 1200 mm wide and are available in standard lengths of 3000 and 6000 mm. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

steel, batch/hot-dip galvanized

Products	H	B	L	P <sub>max</sub>	W
STU 62-02-3F	60 mm	200 mm	3000 mm	4,00 kN	24,900 kg
incl.:					
2 × KHU 60-30F, 10 × STUS 60-02F					
STU 62-03-3F	60 mm	300 mm	3000 mm	4,00 kN	26,400 kg
incl.:					
2 × KHU 60-30F, 10 × STUS 60-03F					
STU 62-04-3F	60 mm	400 mm	3000 mm	4,00 kN	28,000 kg
incl.:					
2 × KHU 60-30F, 10 × STUS 60-04F					
STU 62-05-3F	60 mm	500 mm	3000 mm	4,00 kN	29,500 kg
incl.:					
2 × KHU 60-30F, 10 × STUS 60-05F					
STU 62-06-3F	60 mm	600 mm	3000 mm	4,00 kN	31,100 kg
incl.:					
2 × KHU 60-30F, 10 × STUS 60-06F					
STU 62-07-3F	60 mm	700 mm	3000 mm	4,00 kN	32,600 kg
incl.:					
2 × KHU 60-30F, 10 × STUS 60-07F					
STU 62-08-3F	60 mm	800 mm	3000 mm	4,00 kN	34,200 kg
incl.:					
2 × KHU 60-30F, 10 × STUS 60-08F					

Page 1



# PRODUCT INFORMATION

Products	H	B	L	P <sub>max</sub>	W
STU 62-09-3F	60 mm	900 mm	3000 mm	4,00 kN	35,700 kg
incl.: 10 × STUS 60-09F, 2 × KHU 60-30F					
STU 62-10-3F	60 mm	1000 mm	3000 mm	4,00 kN	37,200 kg
incl.: 2 × KHU 60-30F, 10 × STUS 60-10F					
STU 62-11-3F	60 mm	1100 mm	3000 mm	4,00 kN	38,700 kg
incl.: 2 × KHU 60-30F, 10 × STUS 60-11F					
STU 62-12-3F	60 mm	1200 mm	3000 mm	4,00 kN	40,300 kg
incl.: 2 × KHU 60-30F, 10 × STUS 60-12F					
STU 62-02F	60 mm	200 mm	6000 mm	4,00 kN	49,880 kg
incl.: 2 × KHU 60-60F, 20 × STUS 60-02F					
STU 62-03F	60 mm	300 mm	6000 mm	4,00 kN	52,880 kg
incl.: 2 × KHU 60-60F, 20 × STUS 60-03F					
STU 62-04F	60 mm	400 mm	6000 mm	4,00 kN	56,080 kg
incl.: 2 × KHU 60-60F, 20 × STUS 60-04F					
STU 62-05F	60 mm	500 mm	6000 mm	4,00 kN	59,080 kg
incl.: 2 × KHU 60-60F, 20 × STUS 60-05F					
STU 62-06F	60 mm	600 mm	6000 mm	4,00 kN	62,280 kg
incl.: 2 × KHU 60-60F, 20 × STUS 60-06F					
STU 62-07F	60 mm	700 mm	6000 mm	4,00 kN	65,280 kg
incl.: 2 × KHU 60-60F, 20 × STUS 60-07F					
STU 62-08F	60 mm	800 mm	6000 mm	4,00 kN	68,480 kg
incl.: 20 × STUS 60-08F, 2 × KHU 60-60F					
STU 62-09F	60 mm	900 mm	6000 mm	4,00 kN	71,480 kg

Page 2




# PRODUCT INFORMATION

Products	H	B	L	P <sub>max</sub>	W
incl.: 2 × KHU 60-60F, 20 × STUS 60-09F					
STU 62-10F	60 mm	1000 mm	6000 mm	4,00 kN	74,480 kg
incl.: 2 × KHU 60-60F, 20 × STUS 60-10F					
STU 62-11F	60 mm	1100 mm	6000 mm	4,00 kN	77,480 kg
incl.: 2 × KHU 60-60F, 20 × STUS 60-11F					
STU 62-12F	60 mm	1200 mm	6000 mm	4,00 kN	80,680 kg
incl.: 2 × KHU 60-60F, 20 × STUS 60-12F					

**H:** height  
**B:** width  
**L:** length  
**P<sub>max</sub>:** maximum load  
**W:** Weight per storage unit

## DETAIL AND APPLICATION IMAGES

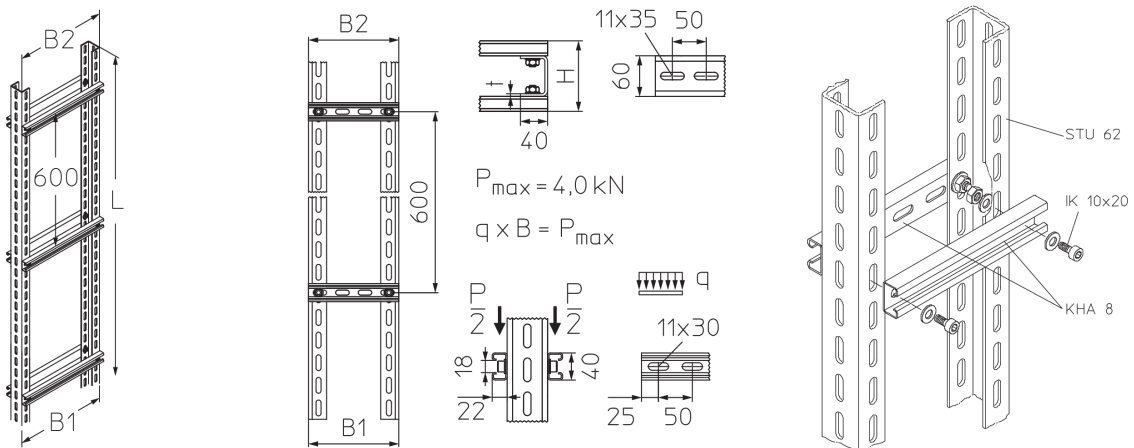

## OPTIONAL ACCESSORIES

STUS 60, AC, KHUV 60, STR 50, STR 110, STD-A, RD, BGU 60, BL 4, SU 60, KZF, KZS





PohlCon GmbH  
Nobelstraße 51 | 12057 Berlin  
Telefon: +49 30 68283-04 | Fax: +49 30 68283-383 | [contact@pohlcon.com](mailto:contact@pohlcon.com)

