


UB

Mounting bracket



UB components are fastening brackets for installing screed-covered duct systems. The brackets ensure that the individual duct sections are securely fastened to the system's UVB vertical bends. They are made of sendzimir hot-dip galvanised sheet steel to DIN EN 10346. They are available in heights from 28 to 48 mm, widths from 194 mm and lengths from 42 mm. Additional accessories are optionally available.



Products	H	B	L	W
UB 28-190S	28 mm	194 mm	42 mm	0,090 kg
UB 28-250S	28 mm	254 mm	42 mm	0,108 kg
UB 28-350S	28 mm	354 mm	42 mm	0,142 kg
UB 38-190S	38 mm	194 mm	42 mm	0,094 kg
UB 38-250S	38 mm	254 mm	42 mm	0,112 kg
UB 38-350S	38 mm	354 mm	42 mm	0,146 kg
UB 48-190S	48 mm	194 mm	42 mm	0,100 kg
UB 48-250S	48 mm	254 mm	42 mm	0,120 kg
UB 48-350S	48 mm	354 mm	42 mm	0,152 kg

H: height


B: width

L: length

W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



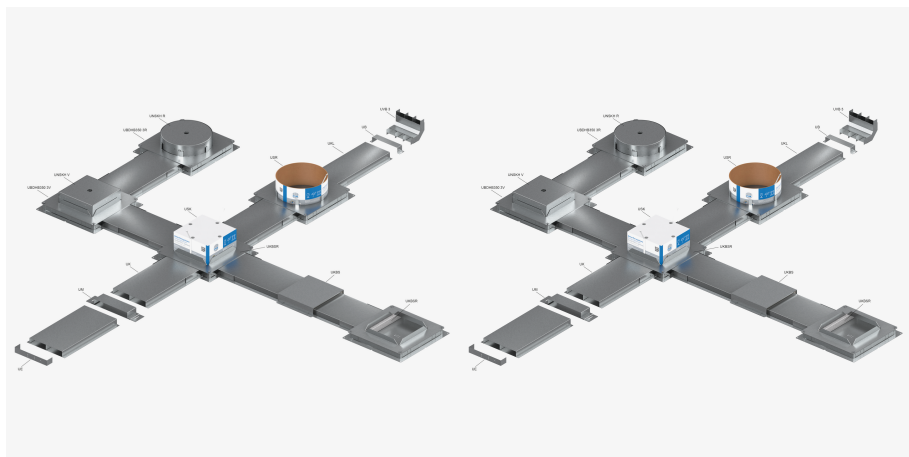

OPTIONAL ACCESSORIES

UN



Load requirements according to, DIN EN 5085

