


UBDHB 122R

False floor socket, 1x, round



The UBDHB 122R components are false floor sockets that are installed as pull boxes and built-in boxes on screed-covered underfloor ducts. They have a mounting hole to accommodate a round formwork body, which is replaced by a round single BODO outlet during final installation. The supplied earthing clamps are used for equipotential bonding. The floor sockets with side walls that can be bent open on all sides are made of sendzimir hot-dip galvanised sheet steel in accordance with DIN EN 10346 and have VDE/TÜV approval in accordance with DIN EN 50085.



Products	H	H _{min}	B1	B2	L1	L2	E	mounting box	W
UBDHB 38-122R	42 mm	73 mm	150 mm	160 mm	150 mm	160 mm	123 mm	1	0 1 0,572 kg
incl.:									
1 x UBDHB-Z									

H: height

H_{min}: minimum installation height

B1: width

B2: width

L1: length 1

L2: length 2






E: fitting dimension

mounting box: maximum number of installable device casings

W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



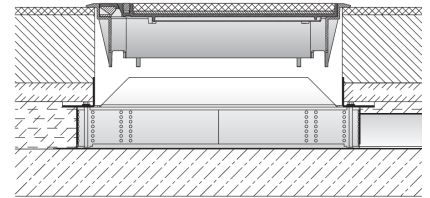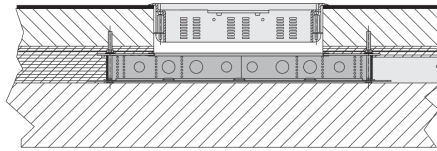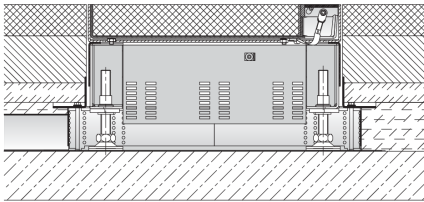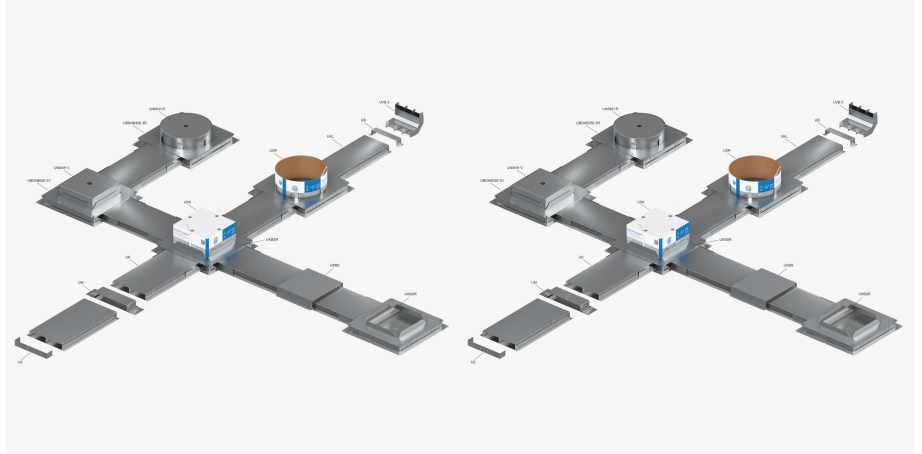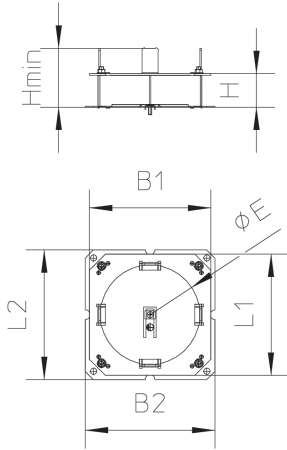

OPTIONAL ACCESSORIES

USKR, UN

DIN

Load requirements according to, DIN EN 50085

