


UBDHB190 1V

False floor socket, 1x, angular



The UBDHB190 1V components are false floor sockets that are installed as pull boxes and built-in boxes on screed-covered underfloor ducts. They have a mounting hole to accommodate a formwork body, which is replaced by a square plastic installation unit during final assembly. The supplied earthing clamps are used for equipotential bonding. The floor sockets with side walls that can be bent open on all sides are made of sendzimir hot-dip galvanised sheet steel in accordance with DIN EN 10346 and have VDE/TÜV approval in accordance with DIN EN 50085.

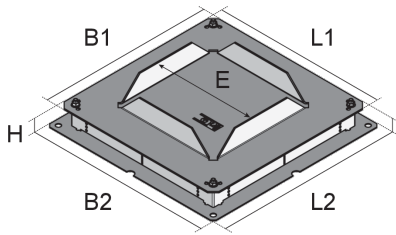

Products	H	H _{min}	B1	B2	L1	L2	E	mounting box	weight
UBDHB190 28-160V	31 mm	67 mm	270 mm	290 mm	270 mm	290 mm	165 mm	1	0 1 1,391 kg
incl.: 1 × UBDHB-Z									
UBDHB190 38-160V	41 mm	77 mm	270 mm	290 mm	270 mm	290 mm	165 mm	1	0 1 1,455 kg
incl.: 1 × UBDHB-Z									
UBDHB190 48-160V	51 mm	87 mm	270 mm	290 mm	270 mm	290 mm	165 mm	1	0 1 1,515 kg
incl.: 1 × UBDHB-Z									

H: height

H_{min}: minimum installation height

B1: width

B2: width

L1: length 1

L2: length 2


E: fitting dimension

mounting box: maximum number of installable device casings



PRODUCT INFORMATION

DETAIL AND APPLICATION IMAGES

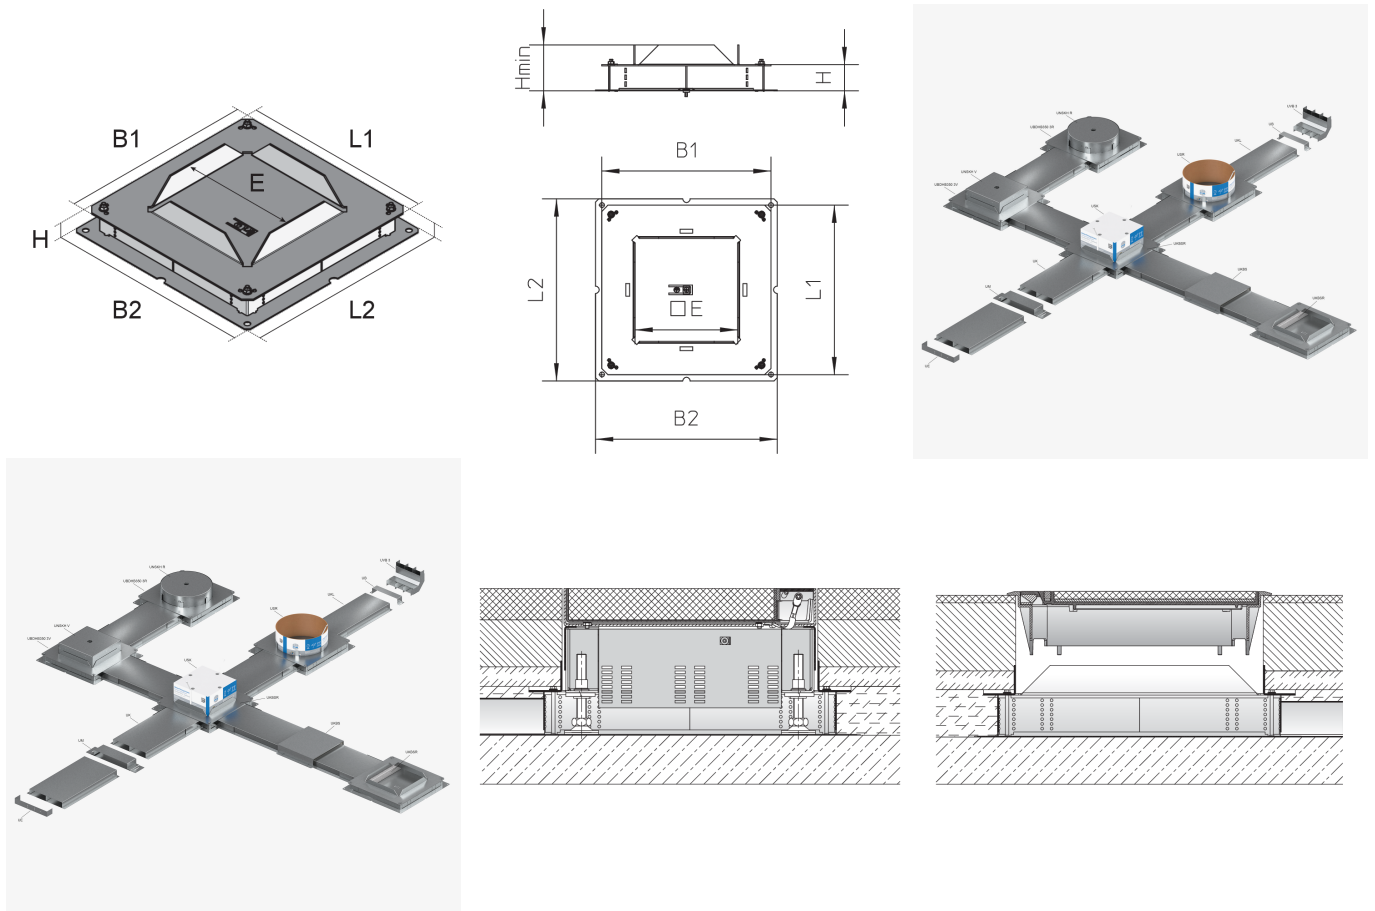

OPTIONAL ACCESSORIES

USK, UN



Load requirements according to, DIN EN 50085

