


## UBDHB350 2R

False floor socket, 2x, round



The UBDHB350 2R components are false floor sockets that are installed as pull boxes and built-in boxes on screed-covered underfloor ducts. They have a mounting hole to accommodate a formwork pipe, which is replaced by a round plastic or stainless steel installation unit during final assembly. The supplied earthing clamps are used for equipotential bonding. The floor sockets with side walls that can be bent open on all sides are made of sendzimir hot-dip galvanised sheet steel in accordance with DIN EN 10346 and have VDE/TÜV approval in accordance with DIN EN 50085.

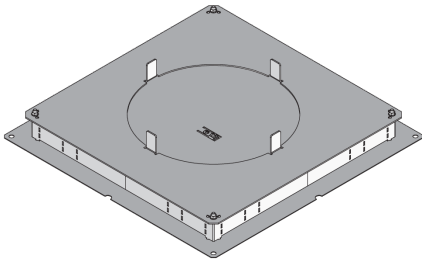





Products	H	H <sub>min</sub>	B1	B2	L1	L2	E	mounting box	weight
UBDHB350 28-259R	31 mm	63 mm	410 mm	450 mm	410 mm	450 mm	260 mm	2	0 1 3,314 kg
incl.: 1 × UBDHB-Z									
UBDHB350 38-259R	41 mm	73 mm	410 mm	450 mm	410 mm	450 mm	260 mm	2	0 1 3,406 kg
incl.: 1 × UBDHB-Z									
UBDHB350 48-259R	51 mm	83 mm	410 mm	450 mm	410 mm	450 mm	260 mm	2	0 1 3,502 kg
incl.: 1 × UBDHB-Z									

**H:** height  
**H<sub>min</sub>:** minimum installation height  
**B1:** width  
**B2:** width  
**L1:** length 1  
**L2:** length 2  
**E:** fitting dimension  
**mounting box:** maximum number of installable device casings



# PRODUCT INFORMATION

## DETAIL AND APPLICATION IMAGES

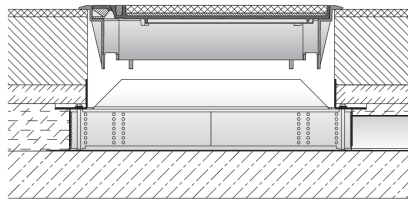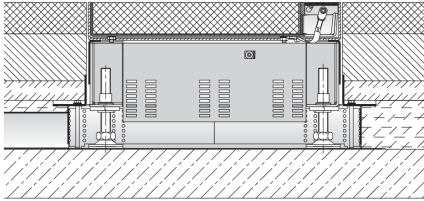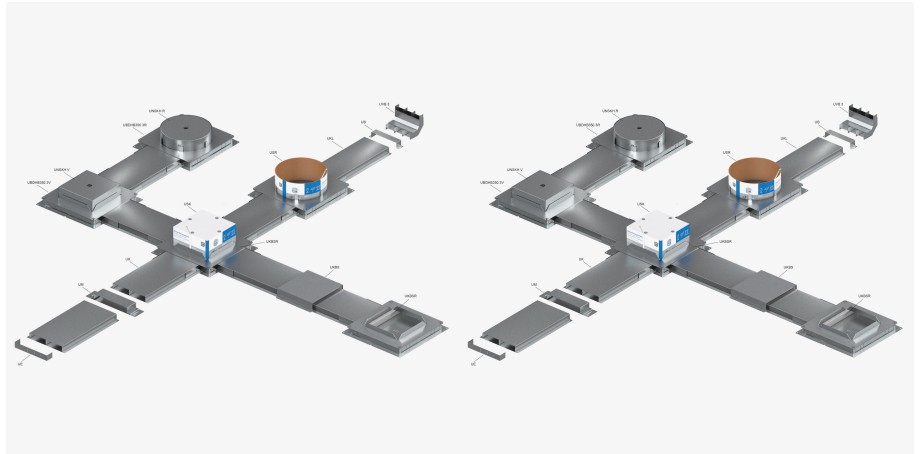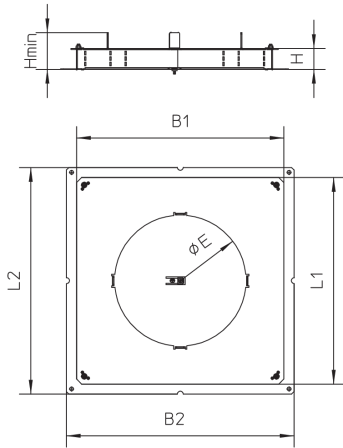

## OPTIONAL ACCESSORIES

USR, UN



Load requirements according to, DIN EN 50085

