


UBDHB350 3R

False floor socket, 3x, round



The UBDHB350 3R components are false floor sockets that are installed as pull boxes and built-in boxes on screed-covered underfloor ducts. They have a mounting hole to accommodate a formwork pipe, which is replaced by a round plastic or stainless steel installation unit during final assembly. The supplied earthing clamps are used for equipotential bonding. The floor sockets with side walls that can be bent open on all sides are made of sendzimir hot-dip galvanised sheet steel in accordance with DIN EN 10346 and have VDE/TÜV approval in accordance with DIN EN 50085.

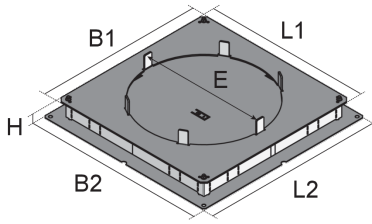

Products	H	H _{min}	B1	B2	L1	L2	E	mounting box	weight
UBDHB350 28-308R	31 mm	67 mm	410 mm	450 mm	410 mm	450 mm	310 mm	3	0 1 2,981 kg
incl.: 1 × UBDHB-Z									
UBDHB350 38-308R	41 mm	77 mm	410 mm	450 mm	410 mm	450 mm	310 mm	3	0 1 3,073 kg
incl.: 1 × UBDHB-Z									
UBDHB350 48-308R	51 mm	87 mm	410 mm	450 mm	410 mm	450 mm	310 mm	3	0 1 3,169 kg
incl.: 1 × UBDHB-Z									

H: height

H_{min}: minimum installation height

B1: width

B2: width

L1: length 1

L2: length 2


E: fitting dimension

mounting box: maximum number of installable device casings



PRODUCT INFORMATION

DETAIL AND APPLICATION IMAGES

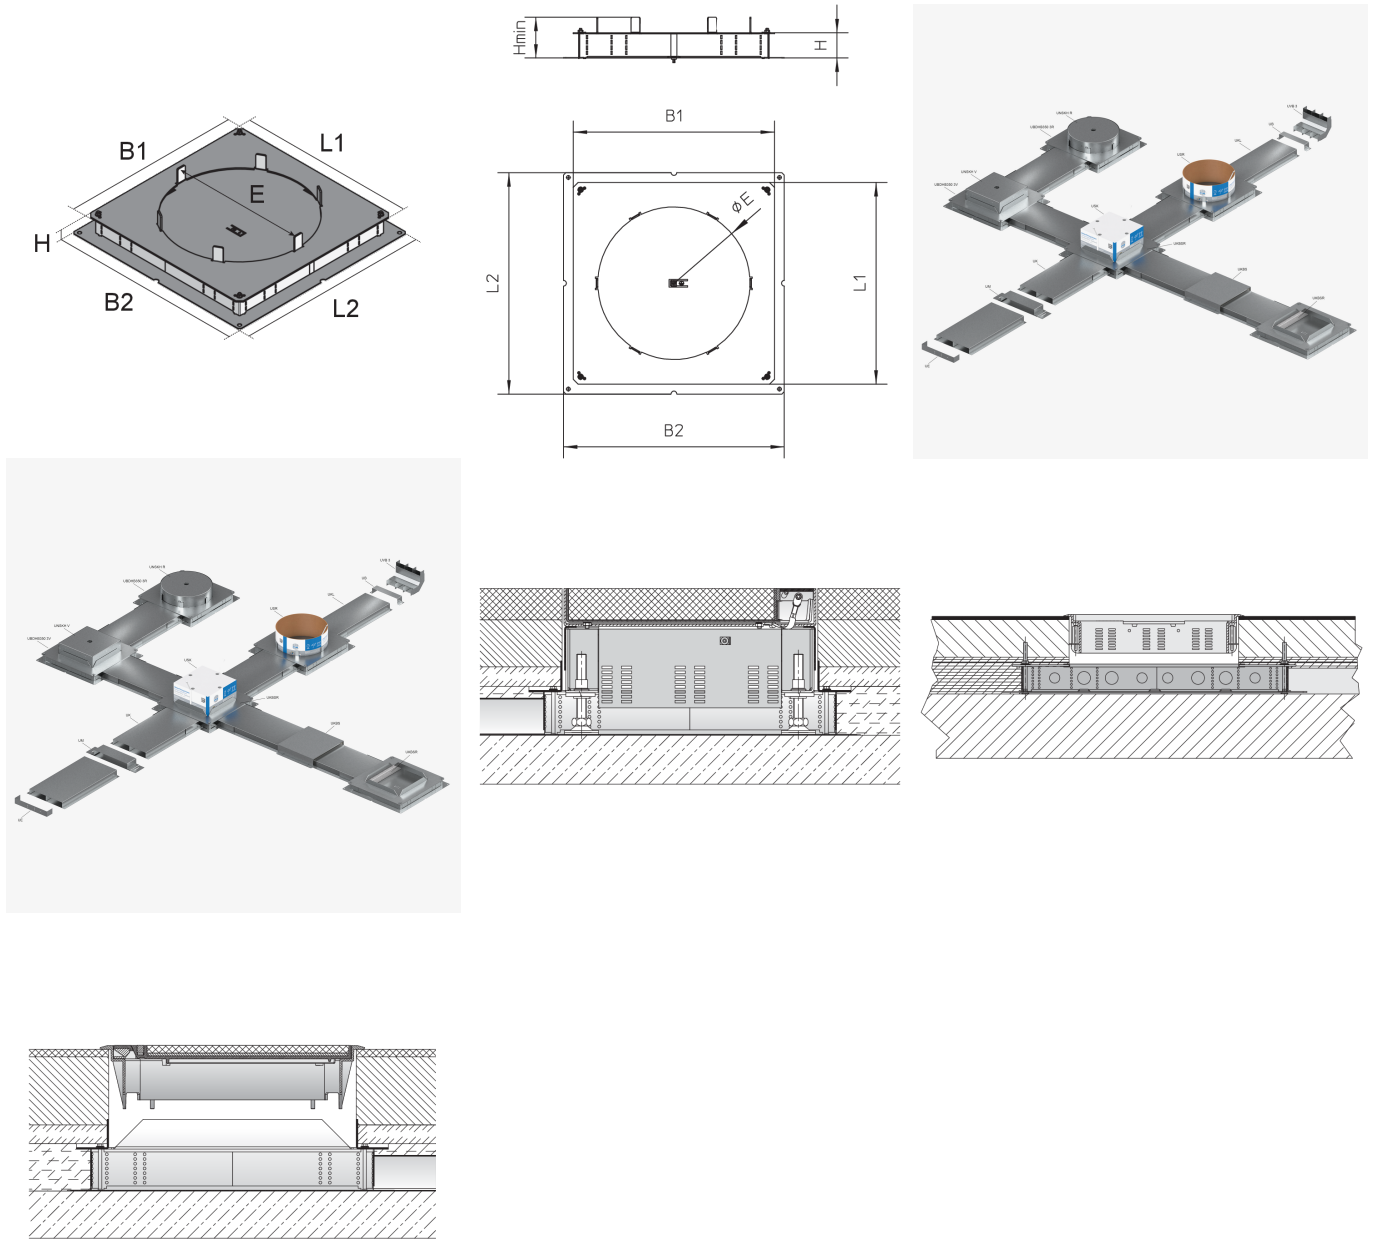

OPTIONAL ACCESSORIES

USR, UN



DIN

Load requirements according to, DIN EN 50085

