


UBKAB

Profile outside bend

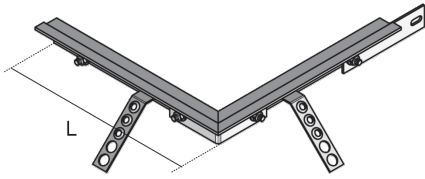

UBKAB articles are external bends for screed-flush heavy-duty ducts. These profile bends are used to create formed parts, e.g. 90° bends, by hooking them into the duct bases and side profiles. They can be mounted on site using the UBKV connectors. The bends are made of hot-dip galvanised steel in accordance with DIN EN ISO 1461 and are supplied with a UBKPRV connector, a UBKPRVE connector, four SEMS 8 nuts with flanges in accordance with DIN EN 1661 and four round-head bolts with square FRS 8X25 in accordance with DIN 603. The external bends are available in two lengths, 340 or 350 mm.

Products	L	weight
UBKAB5F	300 mm	5,264 kg
incl.:		
1 x UBKPRV, 1 x UBKPRVE, 4 x SEMS 8, 4 x FRS 8X25		
UBKAB8F	300 mm	7,064 kg
incl.:		
4 x FRS 8X25, 1 x UBKPRV, 1 x UBKPRVE, 4 x SEMS 8		
UBKAB10F	300 mm	8,526 kg
incl.:		
1 x UBKPRV, 1 x UBKPRVE, 4 x SEMS 8, 4 x FRS 8X25		

L: length

DETAIL AND APPLICATION IMAGES



