


## UBP-VR

### Dummy cover mounting hole

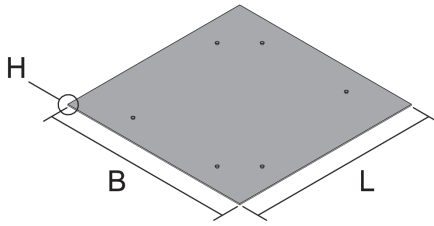

UBP-VR components are dummy covers. They are used to temporarily cover assembly openings in raised and screed floors that are created when plastic formwork or formwork bodies are removed. An additional press-fit threaded bolt serves as an anti-slip device when installing the dummy covers. These products are made of sendzimir hot-dip galvanised sheet steel in accordance with DIN EN 10346. They are 330 mm across, 8 mm high and are made of material 2 mm thick. Their maximum load is 0.75 kN.

Products	B	L	t	P <sub>max</sub>	W
UBP-VR 2S	300 mm	300 mm	2,00 mm	0,75 kN	1,714 kg

**B:** width  
**L:** length  
**t:** material thickness  
**P<sub>max</sub>:** maximum load  
**W:** Weight per storage unit

## DETAIL AND APPLICATION IMAGES

