


## UBSFD4

### Dummy cover



The UBSFD4 component is a dummy cover for the screed-flush duct system UBSF. It is made of hot-dip galvanised sheet steel, has a length of 500 mm resp. 1,000 mm and is available in widths of 200 to 600 mm. The component complies with DIN EN 50085 - the European standard for electrical installation duct systems, and is tested and certified by VDE.

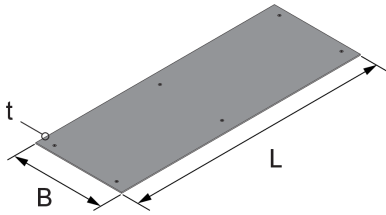

steel, continuously hot galvanized/Senzimir process

| Products      | B      | L       | t    | W         |
|---------------|--------|---------|------|-----------|
| UBSFD4 20S    | 200 mm | 500 mm  | 4 mm | 3,078 kg  |
| UBSFD4 30S    | 300 mm | 500 mm  | 4 mm | 4,647 kg  |
| UBSFD4 40S    | 400 mm | 500 mm  | 4 mm | 6,215 kg  |
| UBSFD4 50S    | 500 mm | 500 mm  | 4 mm | 7,778 kg  |
| UBSFD4 60S    | 600 mm | 500 mm  | 4 mm | 9,352 kg  |
| UBSFD4 20-10S | 200 mm | 1000 mm | 4 mm | 6,145 kg  |
| UBSFD4 30-10S | 300 mm | 1000 mm | 4 mm | 9,283 kg  |
| UBSFD4 40-10S | 400 mm | 1000 mm | 4 mm | 12,421 kg |
| UBSFD4 50-10S | 500 mm | 1000 mm | 4 mm | 15,560 kg |
| UBSFD4 60-10S | 600 mm | 1000 mm | 4 mm | 18,698 kg |




**B:** width  
**L:** length  
**t:** material thickness  
**W:** Weight per storage unit

## DETAIL AND APPLICATION IMAGES



# PRODUCT INFORMATION

---

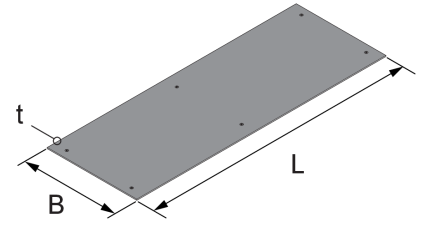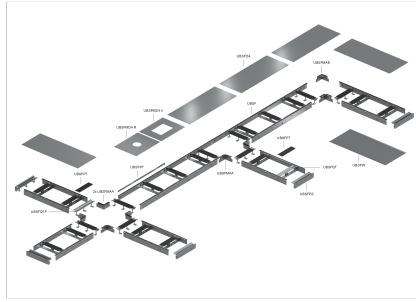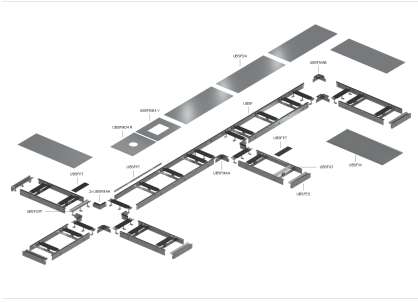

Load requirements according to, DIN EN 50085

