


UBSFQT

Crossbeam



The UBSFQT component is a crossbeam for the screed-flush duct system UBSF and is used to fasten the cover and, at the same time, to support loads. It is also used to support cover joints. It is made of hot-dip galvanized sheet steel and is available in various widths. The component complies with DIN EN 50085 - the European standard for electrical installation duct systems, and is tested and certified by VDE.

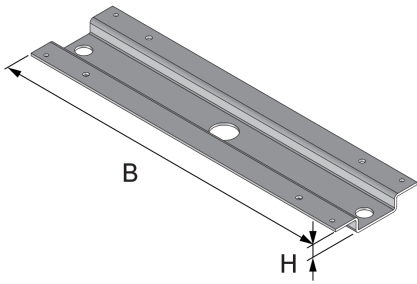

steel, continuously hot galvanized/Senzimir process

Products	H	B	W
UBSFQT 20S	13 mm	200 mm	0,254 kg
UBSFQT 30S	13 mm	300 mm	0,401 kg
UBSFQT 40S	13 mm	400 mm	0,541 kg
UBSFQT 50S	13 mm	500 mm	0,688 kg
UBSFQT 60S	13 mm	600 mm	0,835 kg

H: height




B: width

W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

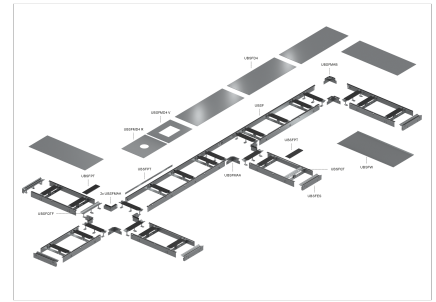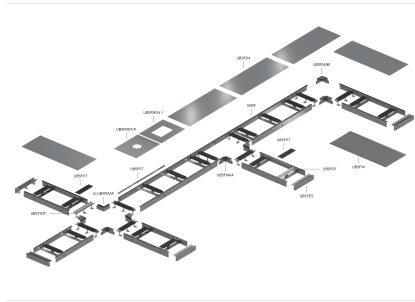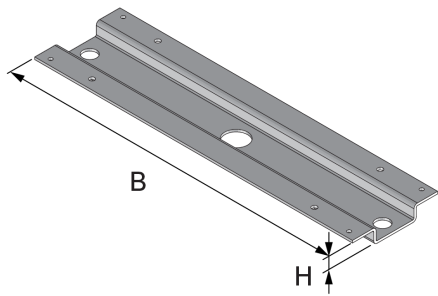

DIN

Load requirements according to, DIN EN 50085

