


## UBSFQTF

Crossbeam, for fittings



The UBSFQTF component is a crossbeam for the screed-flush duct system UBSF. It is used to fasten covers and, at the same time, to support loads as well as to support cover joints on molded parts. The cross bar is made of hot-dip galvanized sheet steel and is available in various widths. The component complies with DIN EN 50085 - the European standard for electrical installation duct systems, and is tested and certified by VDE.

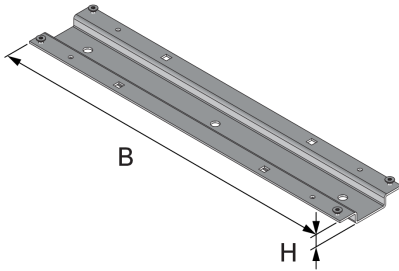

steel, continuously hot galvanized/Senzimir process

Products	H	B	weight
UBSFQTF 20S	13 mm	200 mm	0,262 kg
UBSFQTF 30S	13 mm	300 mm	0,405 kg
UBSFQTF 40S	13 mm	400 mm	0,551 kg
UBSFQTF 50S	13 mm	500 mm	0,698 kg
UBSFQTF 60S	13 mm	600 mm	0,845 kg




**H:** height  
**B:** width

## DETAIL AND APPLICATION IMAGES



# PRODUCT INFORMATION

---

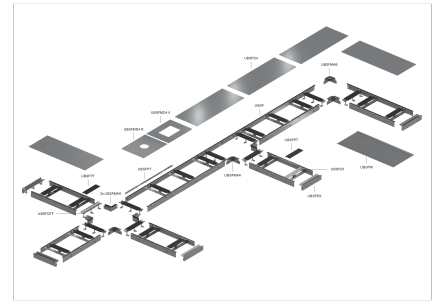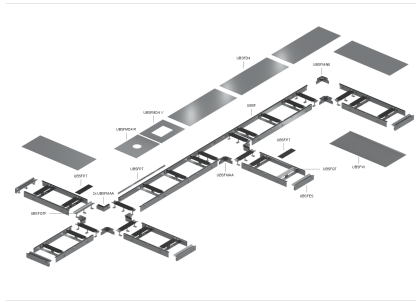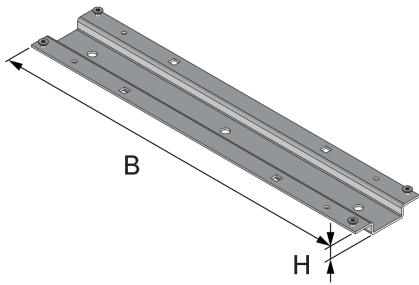

Load requirements according to, DIN EN 50085

