


## UEB3 V

Plastic dummy cover unit, 3x, angular



UEB3 V installation units are angular dummy cover units that are used in assembly covers, UBDHB floor sockets and raised or false floor openings. They act as a mounting frame for three mounting boxes and are suitable for dry-cleaned rooms with office traffic loads. The cover units have a carpet protection frame and are supplied with the universal fixing claws. The covers and frames are made of polyamide with matt surfaces in graphite black (RAL 9011) and iron grey (RAL 7011). They have an IP protection rating of IP 30 in an unused condition, a minimum installation height of 63 mm, installation dimensions of 260 x 260 and a maximum load of 2.

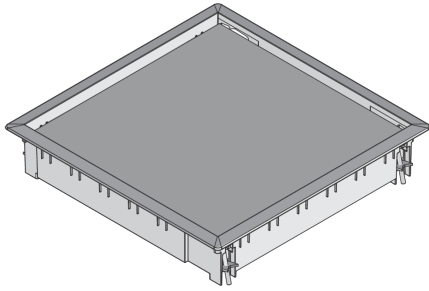

Products	H	H <sub>min</sub>	B	L	E	P <sub>max</sub>	IP <sub>n</sub>	color	T	mounting box	W	
UEB3-V-G	65 mm	63 mm	280 mm	280 mm	x 260 mm	2,00 kN	IP 30	RAL 7011 (iron gray)	10 mm	3	280 mm KUNSTSTOFF	2,273 kg
incl.: 4 x UDKS3-VR												
UEB3-V-S	65 mm	63 mm	280 mm	280 mm	x 260 mm	2,00 kN	IP 30	RAL 9011 (graphite black)	10 mm	3	280 mm KUNSTSTOFF	2,273 kg
incl.: 4 x UDKS3-VR												

**H:** height  
**H<sub>min</sub>:** minimum installation height  
**B:** width  
**L:** length  
**E:** fitting dimension  
**P<sub>max</sub>:** maximum load  
**IP<sub>n</sub>:** IP protection level in unused condition  
**T:** Depth of flooring recess





# PRODUCT INFORMATION

---

**mounting box:** maximum number of installable device casings  
**W:** Weight per storage unit

## DETAIL AND APPLICATION IMAGES

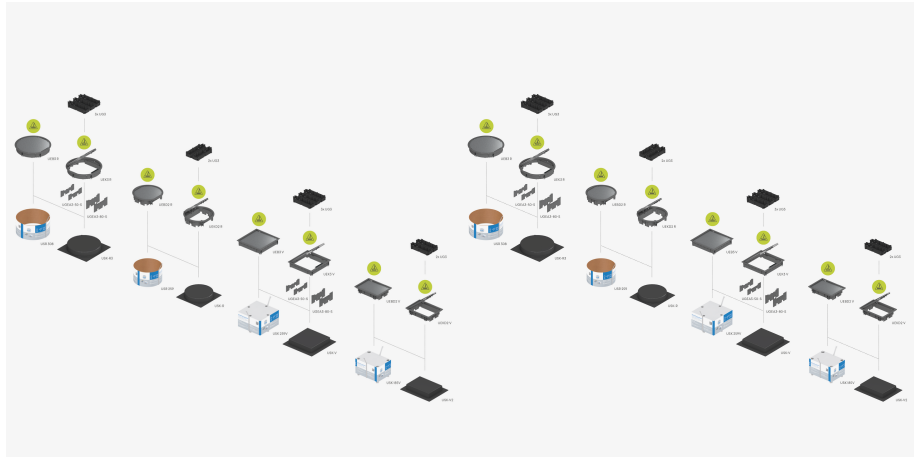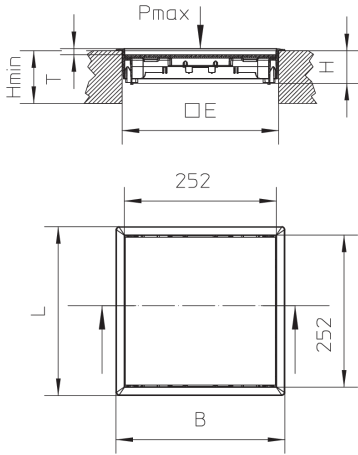

## OPTIONAL ACCESSORIES

UDKS3, UEB V, UDKS 40-80, UDKSEB



dry maintained



Load requirements according to, DIN EN 50085

