


## UEBD VP E

Stainless steel dummy cover unit, 3x, angular, flat



UEBD VP E components are square dummy cover units. They consist of a cartridge mounting frame with a dummy insert cartridge and a rubber seal. The cartridges are mounted on levelling units using UKS M4X16E Phillips screws and can be used with max. 3 mounting boxes in floor sockets, assembly covers and raised or false floor openings in wet-cleaned rooms with office traffic loads. The units are made of stainless steel with a flat surface and slip resistance class R9. They have an IP protection class of IP 54 in an unused condition and a max. load capacity of 4 kN. They have installation dimensions of 261 x 261 mm and a minimum installation height of 85 mm.

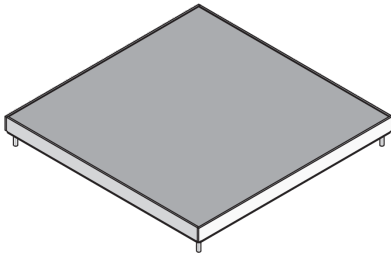

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	H <sub>min</sub>	B	E	P <sub>max</sub>	IP <sub>n</sub>	T	mounting box	W
UEBD 15-VP E	19 mm	85 mm	258 mm	261 x 261 mm	4,00 kN	IP-54	0 mm	3	3,424 kg
incl.:									
1 x UGD3-V 2, 1 x UKS M4X16E									

**H:** height

**H<sub>min</sub>:** minimum installation height

**B:** width

**E:** fitting dimension

**P<sub>max</sub>:** maximum load

**IP<sub>n</sub>:** IP protection level in unused condition

**T:** Depth of flooring recess



**mounting box:** maximum number of installable device casings

**W:** Weight per storage unit

## DETAIL AND APPLICATION IMAGES



# PRODUCT INFORMATION

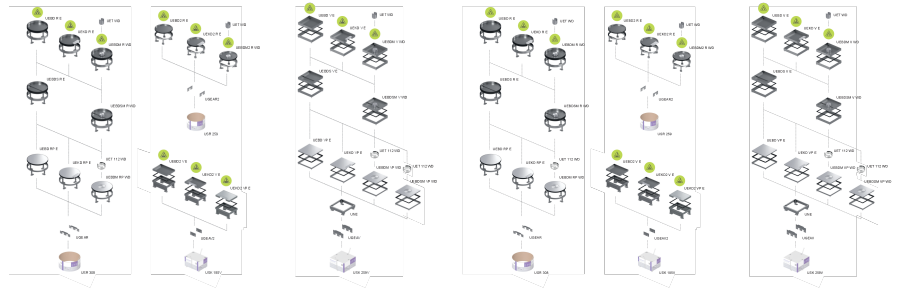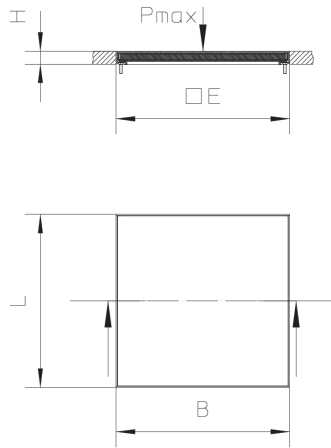

## OPTIONAL ACCESSORIES

UNE



wet maintained



Load requirements according to, DIN EN 50085

