


UEBD2 V

Plastic dummy cover unit, 2x, angular



The UEBD2 V product solutions are angular, plastic dummy cover units with carpet protection frames. They are used in dry-cleaned rooms with floor coverings up to 8 mm, in assembly covers, UBDHB floor sockets and raised or false floor openings. They are designed for office traffic loads and are used as mounting frames for two mounting boxes. The covers and frames are made of polyamide with matt surfaces in graphite black (RAL 9011) and iron grey (RAL 7011). They are supplied with the universal fastening claw sets, with an IP protection level of IP 30 in an unused condition, a min. installation height of 65 mm, a max. load of 2 kN and installation dimensions of 261 x 186 mm.

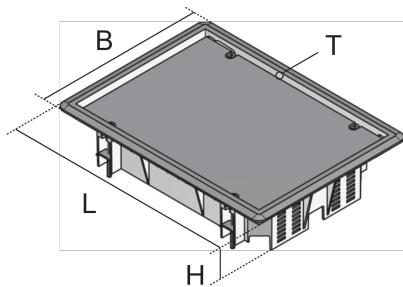

Products	H	H _{min}	B	L	E	P _{max}	IP _n	color	T	mounting box	W	
UEBD2-V-G	65 mm	65 mm	206 mm	280 mm	261 x 186 mm	2,00 kN	IP 30	RAL 7011 (iron gray)	8 mm	2	206 mm KUNSTSTOFF	1,362 kg
incl.: 1 x UDBS-R 4												
UEBD2-V-S	65 mm	65 mm	206 mm	280 mm	261 x 186 mm	2,00 kN	IP 30	RAL 9011 (graphite black)	8 mm	2	206 mm KUNSTSTOFF	1,362 kg
incl.: 1 x UDBS-R 4												





H: height
H_{min}: minimum installation height
B: width
L: length
E: fitting dimension
P_{max}: maximum load
IP_n: IP protection level in unused condition
T: Depth of flooring recess



PRODUCT INFORMATION

mounting box: maximum number of installable device casings
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

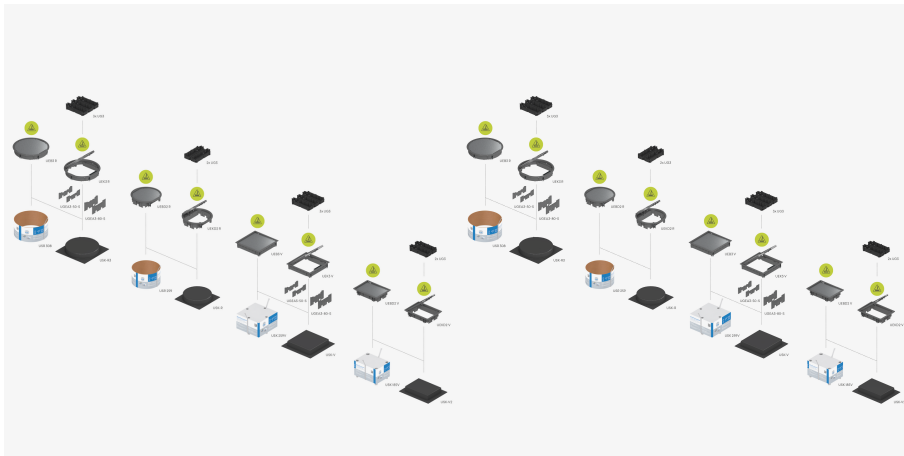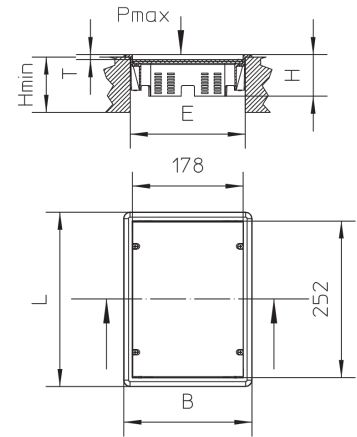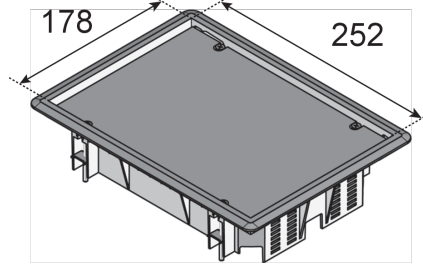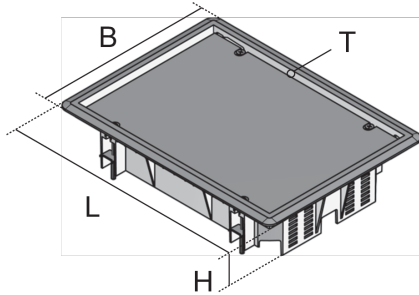

OPTIONAL ACCESSORIES

UEBD V, UDBS 40-80, UDKSEB



dry maintained



Load requirements according to, DIN EN 50085

