


## UEBDD V E

Stainless steel dummy cover cartridge, 3x, angular



UEBDD V E products are square dummy cover cartridges for accommodating up to three mounting boxes. The installation units consist of a carpet protection frame with dummy insert cartridge, rubber seal, opening lever and universal claw set. They are designed for damp-cleaned and dry-cleaned floor coverings with office traffic loads and are used in UBDHB floor sockets, assembly covers and raised or false floor openings. The dummy cover cartridges are made of stainless steel V2A and have an IP protection class of IP 30 in an unused condition. They have a min. installation height of 90 or 100 mm, an installation dimension of 261 x 261 mm and a max. load limit of 2 kN.

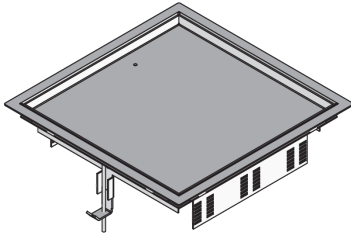

Products	H	H <sub>min</sub>	B	L	E	P <sub>max</sub>	IP <sub>n</sub>	T	mounting box	weight
UEBDD 15-V E	72 mm	90 mm	283 mm	283 mm	261 x 261 mm	2,00 kN	IP-30	12,5 mm	3	1,886 kg
incl.: 1 x UGD-V 2, 2 x UDBS 40-80										
UEBDD 25-V E	82 mm	100 mm	283 mm	283 mm	261 x 261 mm	2,00 kN	IP-30	22,5 mm	3	2,000 kg
incl.: 1 x UGD-V 2, 2 x UDBS 40-80										

**H:** height

**H<sub>min</sub>:** minimum installation height

**B:** width

**L:** length

**E:** fitting dimension

**P<sub>max</sub>:** maximum load

**IP<sub>n</sub>:** IP protection level in unused condition

**T:** Depth of flooring recess



**mounting box:** maximum number of installable device casings



# PRODUCT INFORMATION

---

## DETAIL AND APPLICATION IMAGES

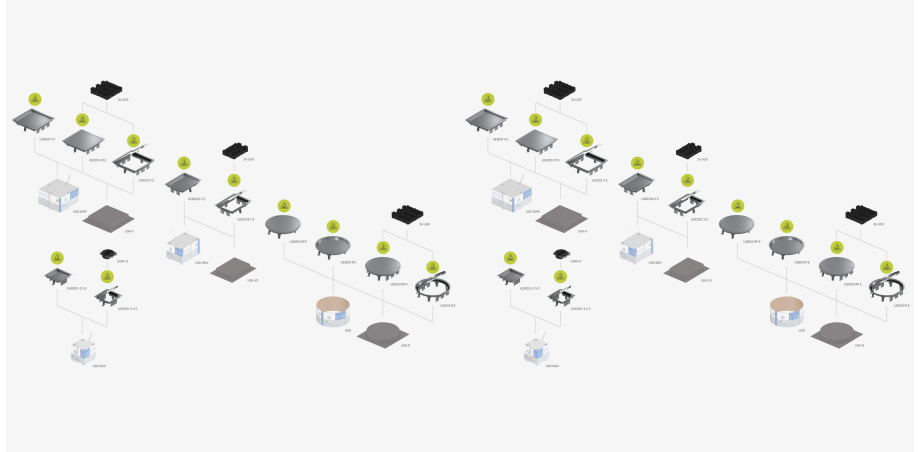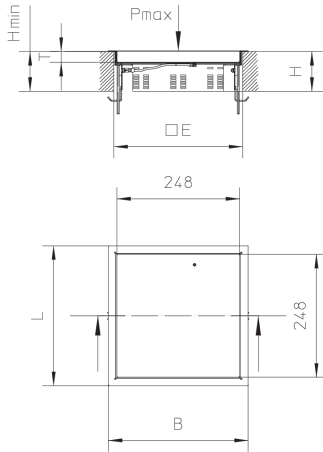

## OPTIONAL ACCESSORIES

UDBS 40-80, UEBDE V



dry maintained



moistly maintained



Load requirements according to, DIN EN 50085

