


UEBDM VP WD

Stainless steel tube cover unit, 3x, angular, flat



UEBDM VP WD construction elements are square tube cover units. They consist of a cartridge mounting frame with a tube outlet cartridge, a bolted tube mounting kit and a rubber seal. They are bolted onto levelling units and can be equipped with max. 3 mounting boxes with installation devices. They are used in floor sockets in wet-cleaned rooms with office traffic loads. The units are made of stainless steel V2A. They have a flat, blasted surface with a slip resistance class of R9, an IP protection class of IP 54 in an unused condition, an IP protection class of IP 22 when used and a maximum load capacity of 4 kN. They have a min. installation height of 85 mm, are 258 mm wide, 19 mm high and have installation dimensions of 261 x 261 mm.

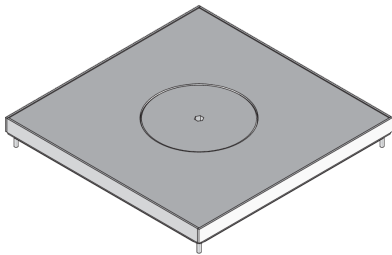

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	H _{min}	B	E	P _{max}	IP _g	IP _n	T	mounting box	W
UEBDM 15-VP-WD	19 mm	85 mm	258 mm	261 x 261 mm	4,00 kN	IP-22	IP-54	0 mm	3	4,612 kg
incl.:										
1 x UETD112-R-WD, 1 x UGD3-V 2, 1 x UKS M4X16E										

H: height

H_{min}: minimum installation height

B: width

E: fitting dimension

P_{max}: maximum load

IP_g: IP protection level in used condition

IP_n: IP protection level in unused condition

T: Depth of flooring recess



mounting box: maximum number of installable device casings

W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

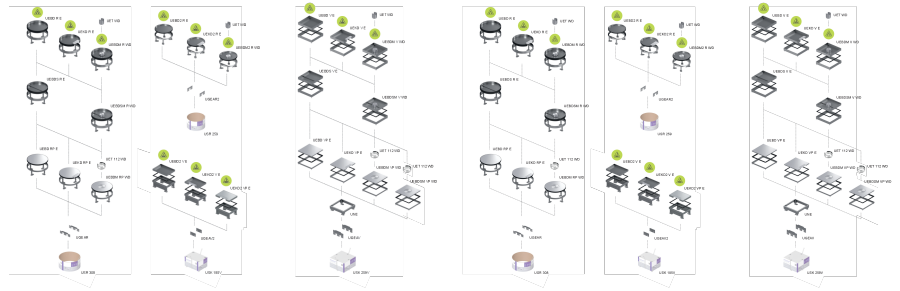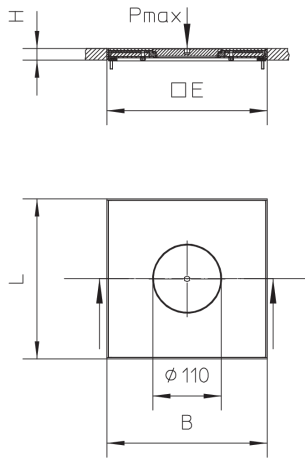

OPTIONAL ACCESSORIES

UET112 WD, UNE



wet maintained



Load requirements according to, DIN EN 50085

