


UEBSAM60 V

Add-on unit for screed-flush duct



UEBSAM60 V is an attachment accessory for screed-covered duct systems. The items are made of sendzimir hot-dip galvanised sheet steel in accordance with DIN EN 10346 and are designed for typical office traffic loads. The sets are delivered pre-assembled on aluminium side profiles with bolted cross-beams, blanked assembly openings, corner pieces and various additional components. UEBSAM60 V add-on units have mounting openings with round cut-outs and are 400 mm wide, 50 mm long and made of material 3 mm thick. The minimum installation height is 60 mm and the levelling range is 50 mm.





Products	H _{min}	N	E	t	W
UEBSAM60-260V 40S	60 mm	50 mm	261 x 261 mm	3,00 mm	9,104 kg
incl.:					
2 x UEBSVE S, 4 x UEBSST 80S, 2 x UEBSPT-3 AL, 1 x UEBSSES 60-40S, 4 x UEBSEA,					
1 x UEBSBMD-260V 40S, 2 x UEBSMSP 60, 2 x UEBSV-50					

H_{min}: minimum installation height
N: levelling range
E: fitting dimension
t: material thickness
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



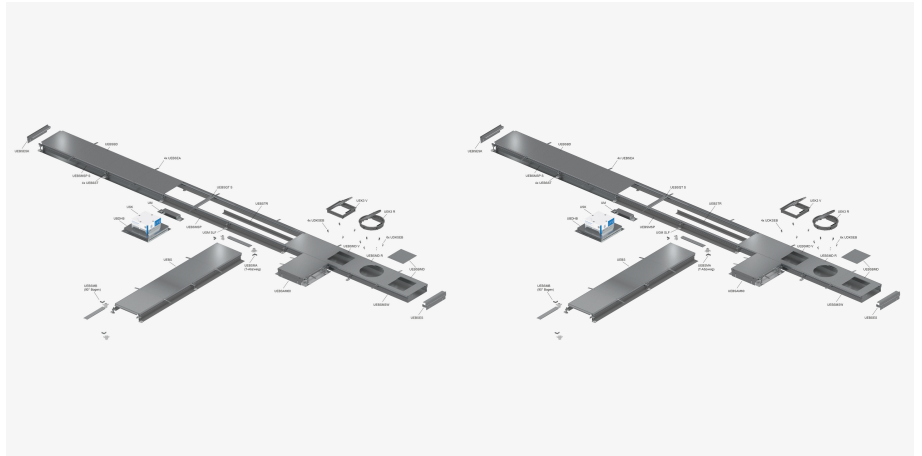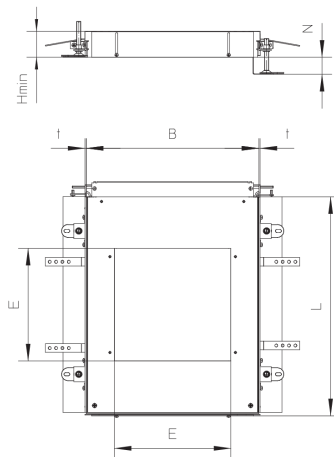

DIN

Load requirements according to, DIN EN 50085

