


UEBSESK

End piece, cartridge



UEBSESK components are end piece cartridges that are used to close off screed-flush ducts. The products can be adapted to the necessary floor covering height. They are made of sendzimir hot-dip galvanised sheet steel in accordance with DIN EN 10346. They have a levelling range of 50 mm, various height and width dimensions and come with a cross-beam.

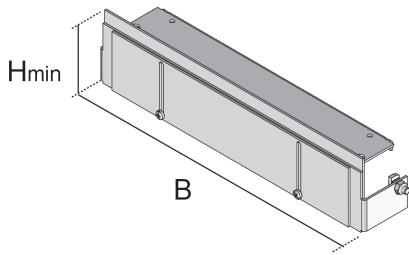

Products	H _{min}	N	W
UEBSESK15 60-20S	60 mm	50 mm	0,570 kg
UEBSESK15 60-30S	60 mm	50 mm	0,877 kg
UEBSESK15 60-40S	60 mm	50 mm	1,397 kg
UEBSESK15 60-50S	60 mm	50 mm	1,768 kg
UEBSESK15 100-20S	100 mm	50 mm	0,680 kg
UEBSESK15 100-30S	100 mm	50 mm	1,050 kg
UEBSESK15 100-40S	100 mm	50 mm	1,632 kg
UEBSESK15 100-50S	100 mm	50 mm	2,066 kg
UEBSESK25 60-20S	60 mm	50 mm	0,601 kg
UEBSESK25 60-30S	60 mm	50 mm	0,925 kg
UEBSESK25 60-40S	60 mm	50 mm	1,460 kg
UEBSESK25 60-50S	60 mm	50 mm	1,847 kg
UEBSESK25 100-20S	100 mm	50 mm	0,711 kg
UEBSESK25 100-30S	100 mm	50 mm	1,208 kg
UEBSESK25 100-40S	100 mm	50 mm	1,705 kg
UEBSESK25 100-50S	100 mm	50 mm	2,145 kg

H_{min}: minimum installation height



N: levelling range

W: Weight per storage unit



PRODUCT INFORMATION

DETAIL AND APPLICATION IMAGES

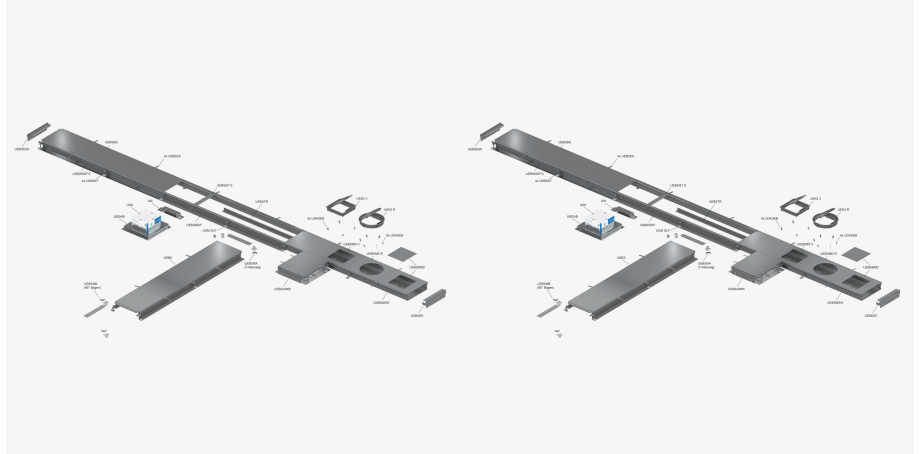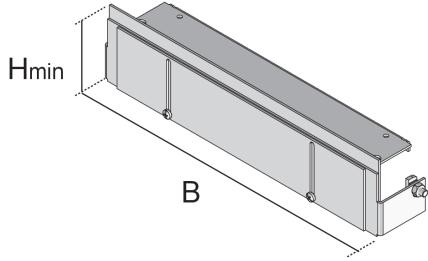

Load requirements according to, DIN EN 50085

