


UEBSQT S

Cross beam

UEBSQT S components are transverse cross-beams for screed-flush ducts and are used to support cover joints. The products are made of sendzimir hot-dip galvanised sheet steel in line with DIN EN 10346 and are supplied with two countersunk sheet metal bolts BSS 4.8 x 16.

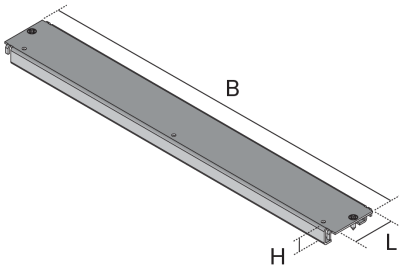

Products	H	B	L	weight
UEBSQT 40S	20 mm	400 mm	61 mm	0,901 kg
incl.:				
2 x BSS 4.8X16				
UEBSQT 50S	20 mm	500 mm	61 mm	1,147 kg
incl.:				
2 x BSS 4.8X16				
UEBSQT 60S	20 mm	600 mm	61 mm	1,147 kg

H: height



B: width

L: length

DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

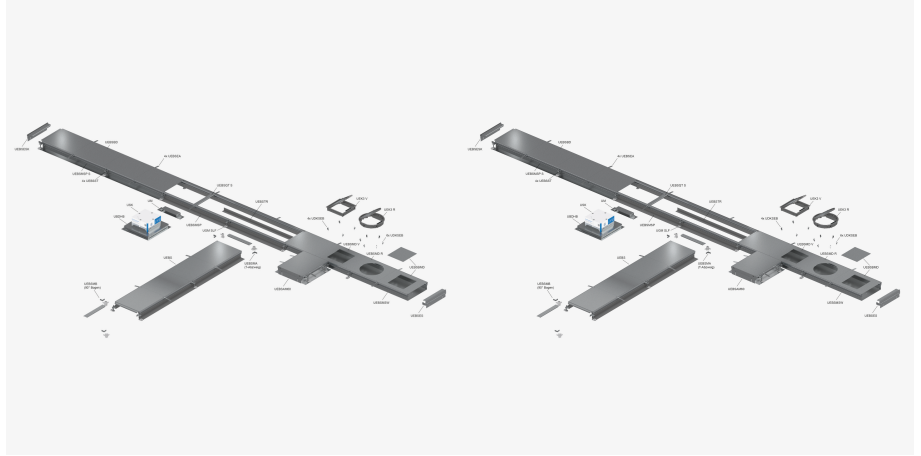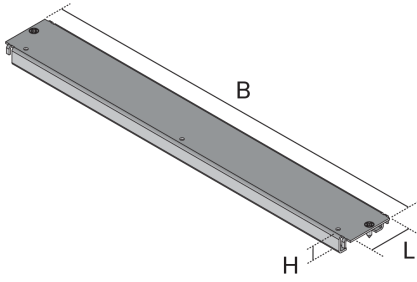

Load requirements according to, DIN EN 50085

