


## UEBSQTF S

### Cross beam



UEBSQTF S components are transverse cross-beams for screed-flush ducts and are used to support cover joints. The products are made of sendzimir hot-dip galvanised sheet steel in line with DIN EN 10346 and are supplied with two countersunk sheet metal bolts BSS 4.8 x 16.

Products	H	B	L	W
UEBSQTF 30S	20 mm	300 mm	61 mm	0,609 kg
incl.:				
2 x BSS 4.8X16				
UEBSQTF 40S	20 mm	400 mm	61 mm	0,855 kg
incl.:				
2 x BSS 4.8X16				
UEBSQTF 50S	20 mm	500 mm	61 mm	1,102 kg
incl.:				
2 x BSS 4.8X16				



**H:** height  
**B:** width  
**L:** length  
**W:** Weight per storage unit

## DETAIL AND APPLICATION IMAGES



# PRODUCT INFORMATION

---

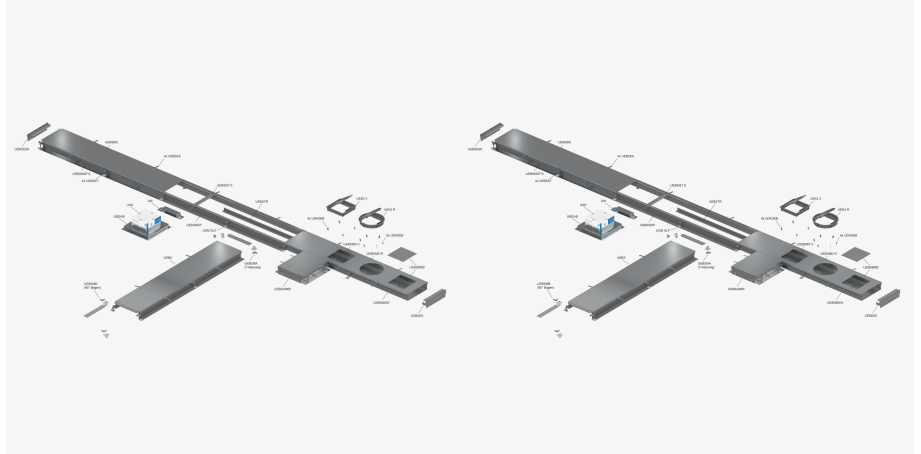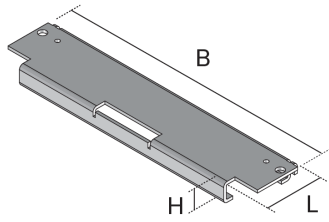

Load requirements according to, DIN EN 50085

