


UEBSST

Levelling support



UEBSST mounting components are levelling supports for height adjustment in screed-flush duct systems. These products are made of sendzimir hot-dip galvanised steel in accordance with DIN EN 10346. They are available in three different installation heights starting from 60 mm, they have an adjustment range of 50 or 100 mm and come in three different weights. The supports are supplied with a button head screw, levelling base and connector and can optionally be extended with an impact sound sleeve accessory.



Products	H _{min}	N	weight
UEBSST 80S	60 mm	50 mm	0,145 kg
incl.: 2 × LKS M5X10, 1 × UBDSLFL 80, 1 × UEBSV S			
UEBSST 150S	100 mm	50 mm	0,179 kg
incl.: 2 × LKS M5X10, 1 × UBDSLFL 150, 1 × UEBSV S			
UEBSST 220S	140 mm	100 mm	0,197 kg
incl.: 2 × LKS M5X10, 1 × UBDSLFL 220, 1 × UEBSV S			



H_{min}: minimum installation height

N: levelling range

DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

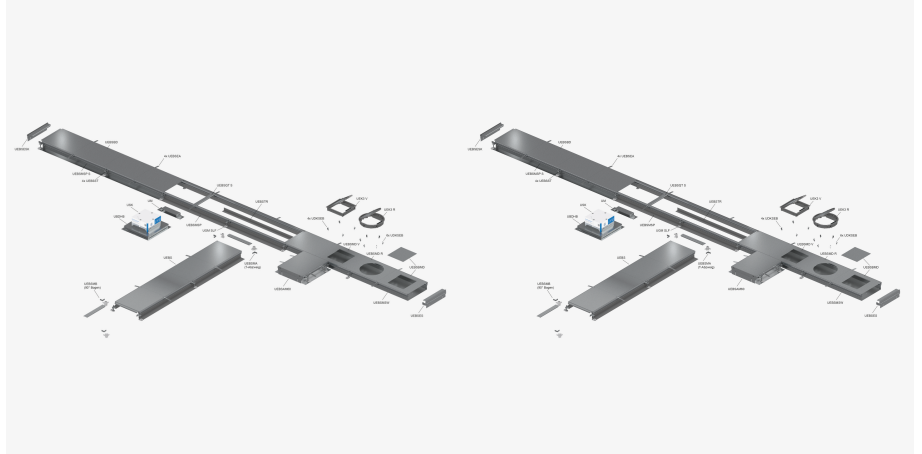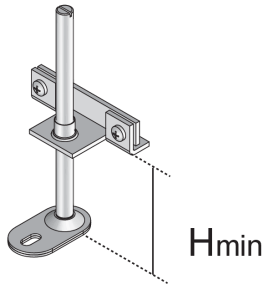

OPTIONAL ACCESSORIES

UGM SLF

DIN

Load requirements according to, DIN EN 5085

