


UEK3 R

Plastic hinged cover unit, 3x, round



UEK3 R installation units are round hinged cover units with carpet protection frames that are used in dry-cleaned rooms in assembly covers, UBDHB floor sockets and in raised or false floor openings. They are designed for office traffic loads and can be used to gradually lower three mounting boxes when supplemented with snap-in ladders. The units have floor-level brush cable outlets that swivel 180°, opening levers and the UDKS3-VR universal claw. The covers and frames are made of polyamide and the insert is made from hot-dip galvanised sheet steel. They have an IP protection rating of IP 30 in an unused condition, an IP protection rating of IP 20 when used, a minimum installation height of 63 mm, a maximum load of 2 kN and installation dimensions of 307 mm.

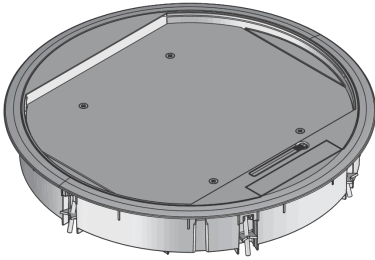

Products	H	H _{min}	B	E	P _{max}	IP _g	IP _n	color	T	mounting box	ø ext	weight
UEK3-R-G	65 mm	63 mm	330 mm	307 mm	2,00 kN	IP-20	IP-30	7011	10 mm	3	329,8 mm	1,935 kg
incl.: 6 × UDKS3-VR												
UEK3-R-S	65 mm	63 mm	330 mm	307 mm	2,00 kN	IP-20	IP-30	9011	10 mm	3	329,8 mm	1,935 kg
incl.: 6 × UDKS3-VR												

H: height

H_{min}: minimum installation height

B: width

E: fitting dimension

P_{max}: maximum load

IP_g: IP protection level in used condition

IP_n: IP protection level in unused condition

T: Depth of flooring recess

mounting box: maximum number of installable device casings

Ø ext:



