


UEK3 V

Plastic hinged cover unit, 3x, angular



UEK3 V installation units are angular, plastic hinged cover units with carpet protection frames that are used in dry-cleaned rooms in assembly covers, UBDHB floor sockets and in raised or false floor openings. They are designed for office traffic loads and can be used to lower three mounting boxes by max. 30 mm. The units have floor-level brush cable outlets that swivel 180°, opening levers and universal claw sets. The covers and frames are made of polyamide in graphite black (RAL 9011) and iron grey (RAL 7011). They have an IP protection rating of IP 30 in an unused condition and an IP protection rating of IP 20 when used. They have a minimum installation height of 63 mm, a maximum load of 2 kN and installation dimensions of 260 x 260 mm.

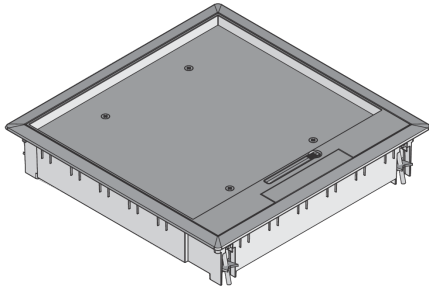

Products	H	H _{min}	B	L	E	P _{max}	IP _g	IP _n	color	T	mounting box	W
UEK3-V-G	65 mm	63 mm	280 mm	280 mm	260 x 260 mm	2,00 kN	IP-20	IP-30	7011	10 mm	3	1,797 kg
incl.: 4 x UDKS3-VR												
UEK3-V-S	65 mm	63 mm	280 mm	280 mm	260 x 260 mm	2,00 kN	IP-20	IP-30	9011	10 mm	3	1,797 kg
incl.: 4 x UDKS3-VR												

H: height

H_{min}: minimum installation height

B: width

L: length

E: fitting dimension

P_{max}: maximum load

IP_g: IP protection level in used condition

IP_n: IP protection level in unused condition

T: Depth of flooring recess



mounting box: maximum number of installable device casings



PRODUCT INFORMATION

W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

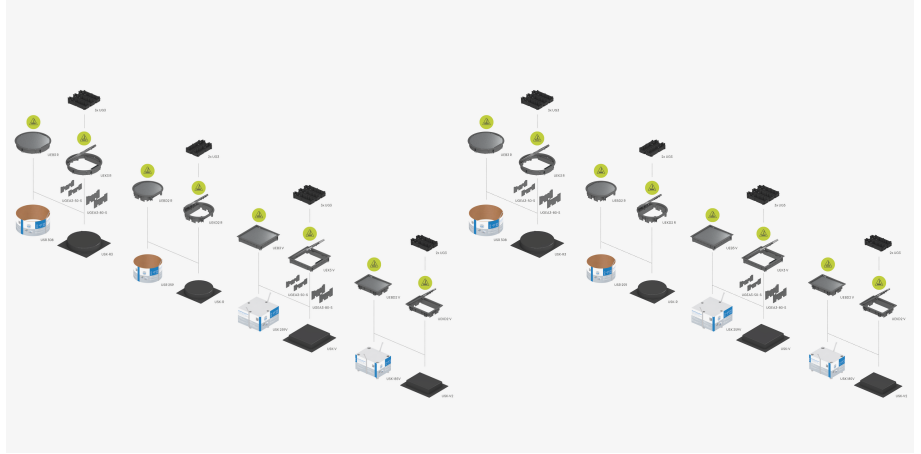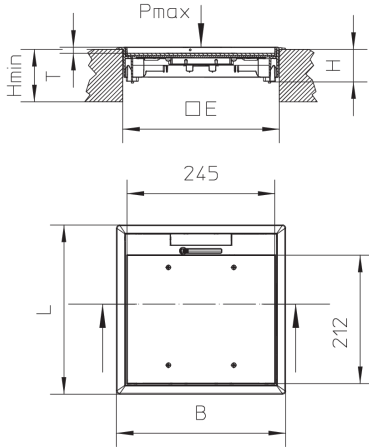

OPTIONAL ACCESSORIES

UDKS3, UEK V, UGEA3, UDKS 40-80, UDKSEB



dry maintained



Load requirements according to, DIN EN 50085

