


UEKD V E

Stainless steel hinged cover unit, 3x, angular



UEKD V E components are square hinged covers with abutting edges. They consist of a cartridge mounting frame with insert cartridge, cable outlet, floor-level cable outlet and rubber seal. They are suitable for floor sockets, assembly covers and raised or false floor openings in dry-cleaned and damp-cleaned rooms with office traffic loads. Installed on levelling units, they can accommodate max. 3 mounting boxes. The cover units are made of stainless steel V2A and have an IP protection class of IP 30 in an unused condition, an IP protection class of IP 20 when used, a max. load of 2 kN and installation dimensions of 261 x 261 mm.

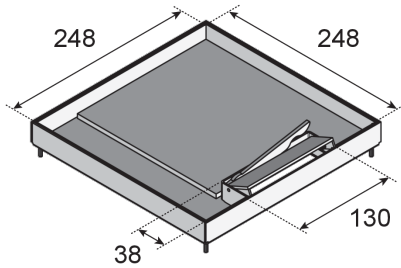

brass

Products	H	H _{min}	B	L	E	P _{max}	IP _g	IP _n	T	mounting box	W
UEKD 25-V MS	29 mm	95 mm	258 mm	258 mm	261 x 261 mm	2,00 kN	IP-20	IP-30	16,5 mm	3	4,867 kg
incl.: 4 x UKS M4X16E, 1 x UGD-V 2											
UEKD 35-V MS	29 mm	105 mm	258 mm	258 mm	261 x 261 mm	2,00 kN	IP-20	IP-30	26,5 mm	3	5,479 kg
incl.: 4 x UKS M4X16E, 1 x UGD-V 2											

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	H _{min}	B	L	E	P _{max}	IP _g	IP _n	T	mounting box	W
UEKD 15-V E	19 mm	85 mm	258 mm	258 mm	261 x 261 mm	2,00 kN	IP-20	IP-30	12,5 mm	3	1,792 kg

Page 1



PRODUCT INFORMATION

Products	H	H _{min}	B	L	E	P _{max}	IP _g	IP _n	T	mounting box	W
incl.: 4 × UKS M4X16E, 1 × UGD-V 2											
UEKD 25-V E	29 mm	95 mm	258 mm	258 mm	261 x 261 mm	2,00 kN	IP-20	IP-30	22,5 mm	3	2,158 kg
incl.: 4 × UKS M4X16E, 1 × UGD-V 2											
UEKD 35-V E	39 mm	105 mm	258 mm	258 mm	261 x 261 mm	2,00 kN	IP-20	IP-30	32,5 mm	3	2,476 kg
incl.: 4 × UKS M4X16E, 1 × UGD-V 2											
UEKD 45-V E	49 mm	115 mm	258 mm	258 mm	261 x 261 mm	2,00 kN	IP-20	IP-30	42,5 mm	3	2,838 kg
incl.: 4 × UKS M4X16E, 1 × UGD-V 2											

H: height

H_{min}: minimum installation height

B: width

L: length

E: fitting dimension

P_{max}: maximum load

IP_g: IP protection level in used condition

IP_n: IP protection level in unused condition

T: Depth of flooring recess


mounting box: maximum number of installable device casings

W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

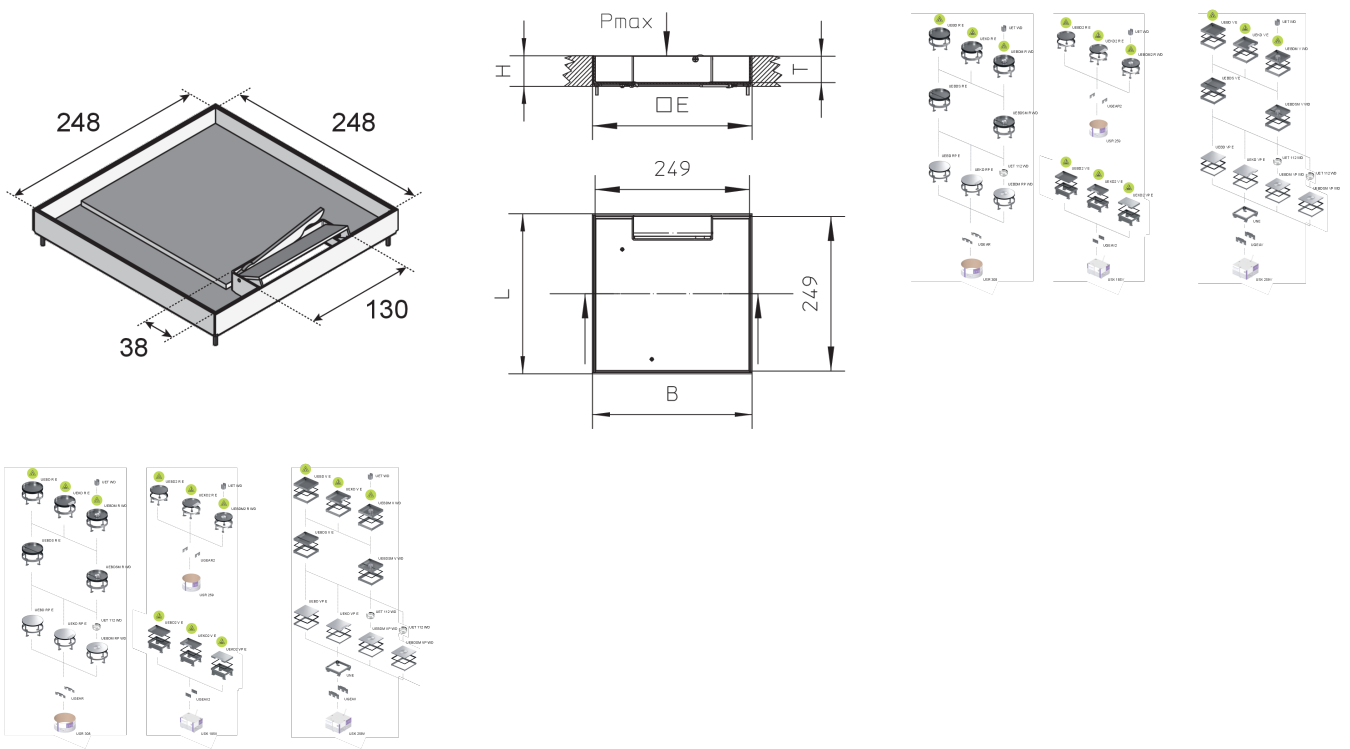

OPTIONAL ACCESSORIES

UEKDE V, UNE



dry maintained



moistly maintained



Load requirements according to, DIN EN 50085

