


UEKDD VP E

Stainless steel hinged cover cartridge, 3x, angular, flat



UEKDD VP E product solutions are square hinged cover cartridges for gradually lowering max. three mounting boxes. The installation units consist of a carpet protection frame with snap-in ladders, a hinged cover with floor-level cable outlet, rubber seal and universal claw set. They are suitable for floor sockets, assembly covers and raised or false floor openings in dry-cleaned or damp-cleaned rooms with office traffic loads. The cartridges are made of stainless steel V2A with a flat, blasted surface. They have an IP protection rating of IP 30 in an unused condition and an IP protection rating of IP 20 when used. They have a minimum installation height of 261 x 261 mm, a maximum load of 2.00 kN and installation dimensions of 90 mm.


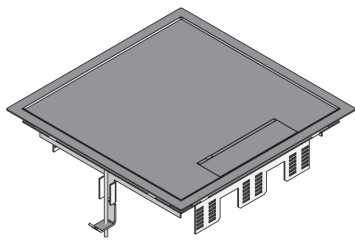


Products	H	H _{min}	B	L	P _{max}	mounting box	E	IP _g	IP _n	T	W
UEKDD 15-VP E	72 mm	90 mm	283 mm	283 mm	2,00 kN	3	261 x 261 mm	IP 20	IP 30	0 mm	5,004 kg
incl.: 1 x UGD-V 2, 2 x UDBS 40-80											

- H: height
- H_{min}: minimum installation height
- B: width
- L: length
- P_{max}: maximum load
- mounting box: maximum number of installable device casings
- E: fitting dimension
- IP_g: IP protection level in used condition
- IP_n: IP protection level in unused condition
- T: Depth of flooring recess
- W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



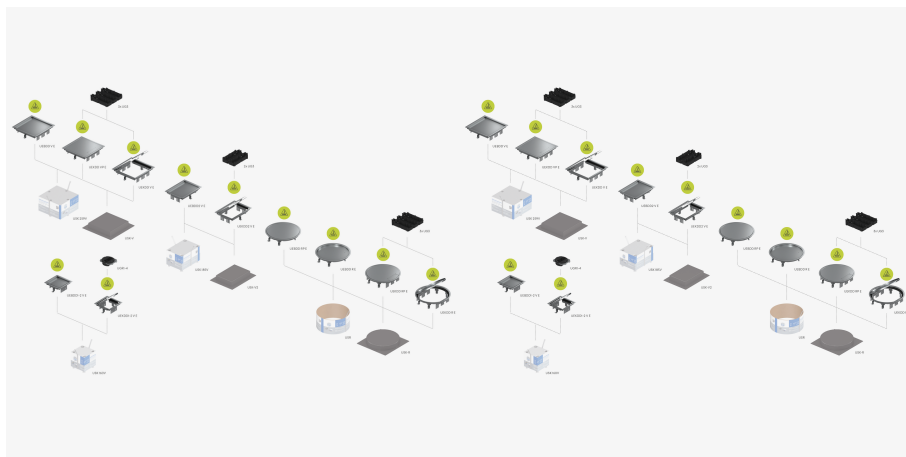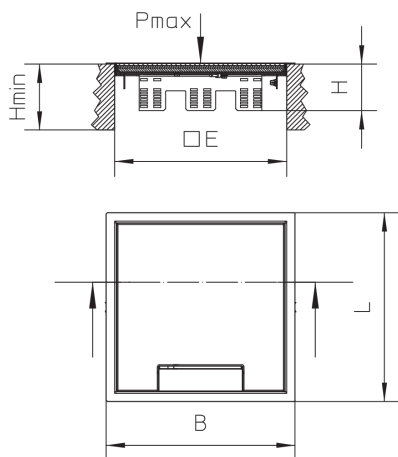

OPTIONAL ACCESSORIES

UDBS 40-80



Floor maintenance, Moist



Load requirements according to, DIN EN 50085

