


PRODUCT INFORMATION

UG3

Mounting box, angular, lowered

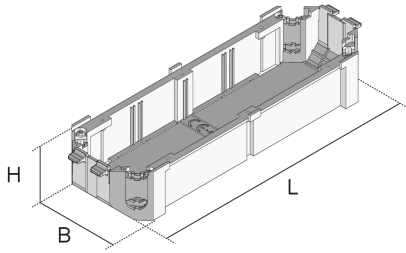

UG3 components are square, lowered mounting boxes consisting of a one-piece shell with a perforated base and a strain relief device for inserting the incoming cables. During assembly, the mounting boxes are snapped into installation units and can be equipped with up to four 45x45 mm installation units or three suspension bracket mounting devices. The mounting boxes are made of ABS copolymer in graphite black (RAL 9011).

DIN

Products	H	B	L	color	installation units/outlet socket	weight
UG3	38 mm	74 mm	225 mm	9011	4x für Kabel Ø 6 bis 12 mm 3x Hängebügel oder 4x 45x45 mm	0,098 kg
incl.:						
4 × UGZ, 4 × BLS 2.9X32						



H: height

B: width

L: length

installation units/outlet socket: max. number of installation units


DETAIL AND APPLICATION IMAGES

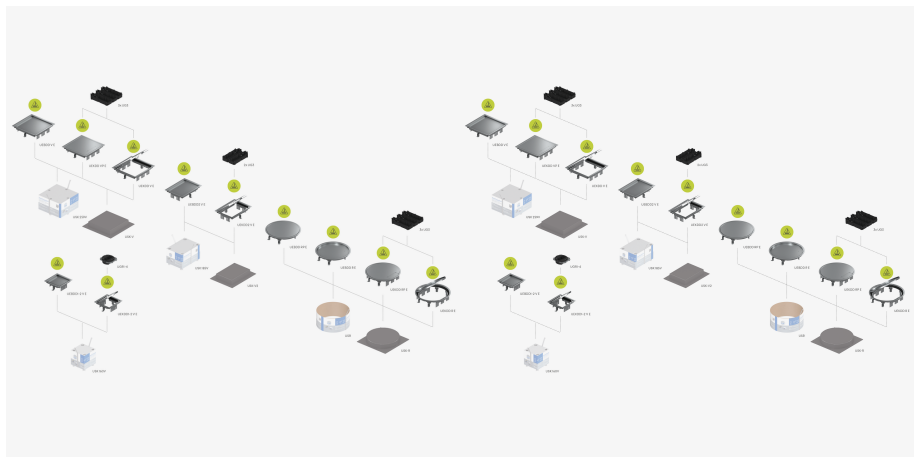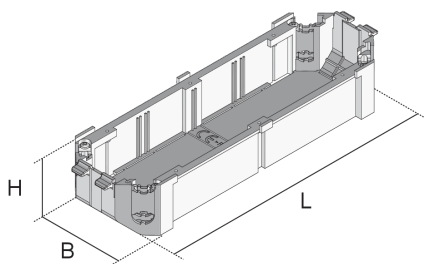

 PohlCon

PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Telefon: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com



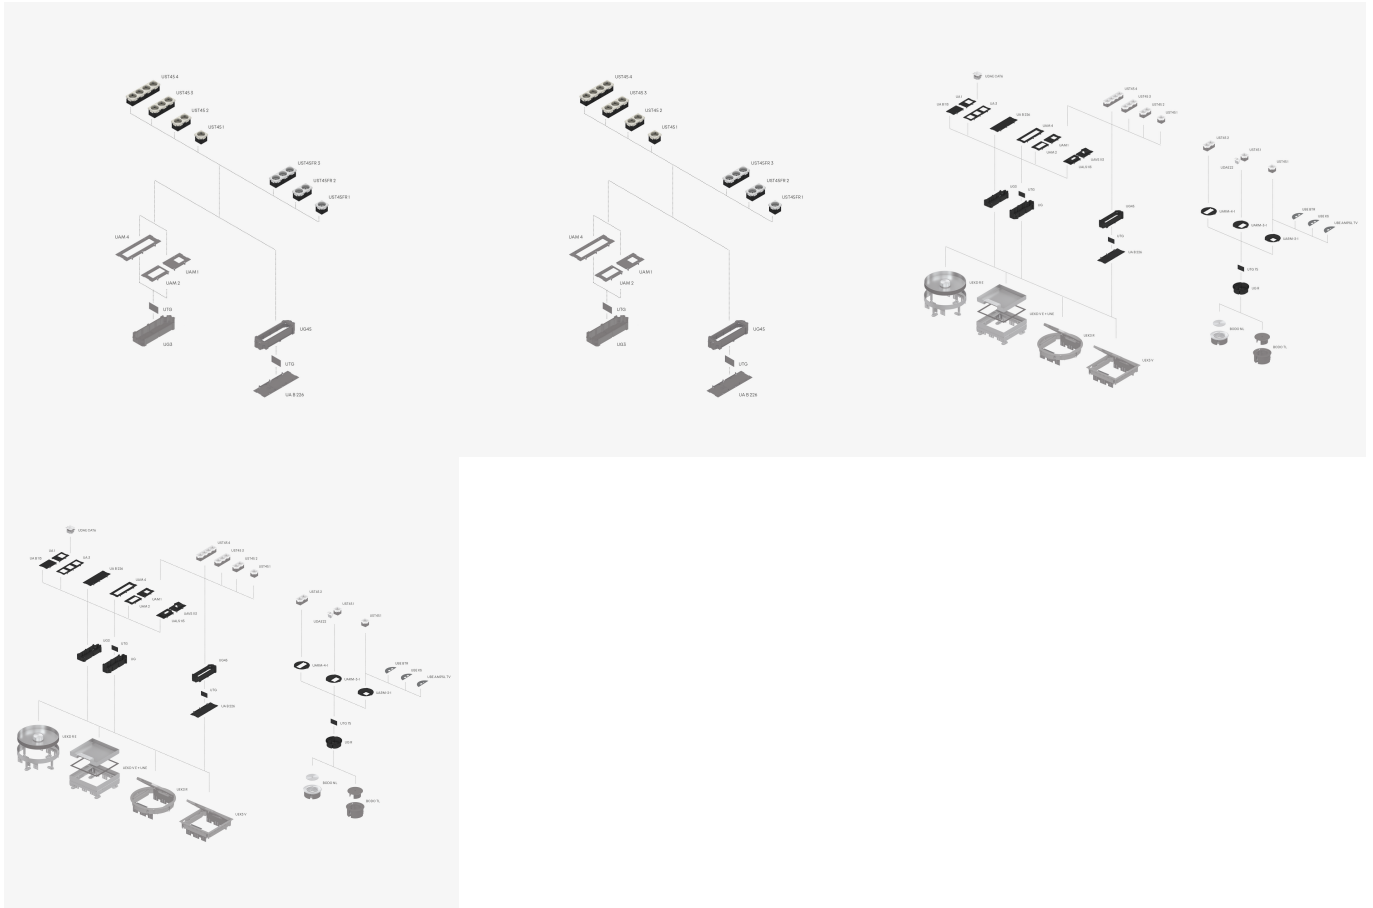

OPTIONAL ACCESSORIES

UTG, UA B 226, UA B 113, UA 3, UA 1, UAM 4, UAM 2, UAM 1

DIN

Load requirements according to, DIN EN 50085

