


UGWIS-FILS6A

Mounting box pre-assembled with RCCB switch, 6 A, Wieland

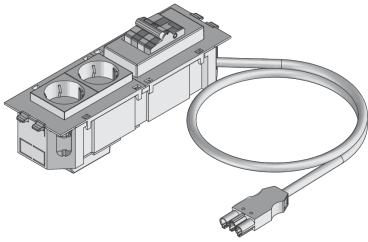

UGWIS-FILS6A components are pre-assembled mounting boxes with a type 6 KA, 1 p + N, 6 A/30 mA residual current circuit breaker (RCCB). The mounting boxes are connected with a 2000 to 3000 mm long connecting cable with a 2.5 mm² cable cross-section and a 3-pin Wieland plug. They are completed by the addition of a 3-pin Wieland device socket under the mounting box and a 2-way socket. They are made of ABS copolymer.

Products	H	B	L	connection cable	KQ		W
UGWIS-O2FILS6A-200	46 mm	74 mm	225 mm	2000 mm	2,5 mm ²	WEISS	0,831 kg
UGWIS-O2FILS6A-300	46 mm	74 mm	225 mm	3000 mm	2,5 mm ²	WEISS	0,981 kg
UGWIS-W2FILS6A-200	46 mm	74 mm	225 mm	2000 mm	2,5 mm ²	SCHWARZ	0,831 kg
UGWIS-W2FILS6A-300	46 mm	74 mm	225 mm	3000 mm	2,5 mm ²	SCHWARZ	0,981 kg

H: height

B: width


L: length

KQ:

W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



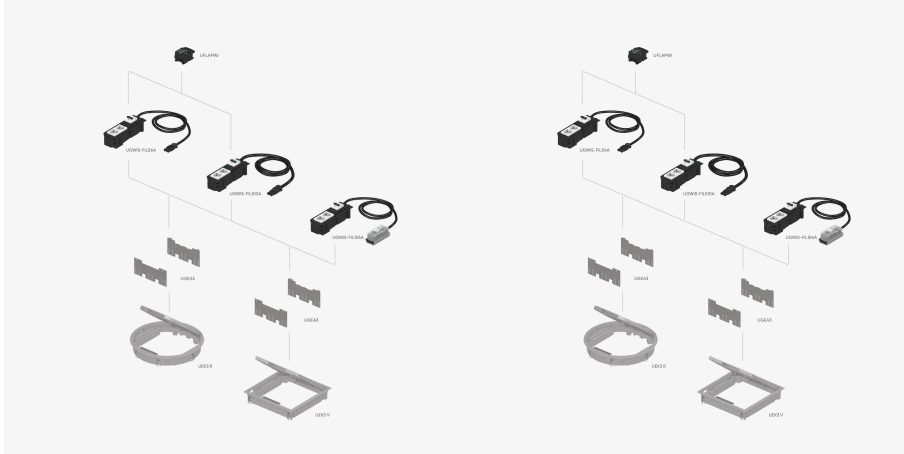

OPTIONAL ACCESSORIES

UFLAPWI

