


UKE125 V

Stainless steel hinged cover compact single outlet, 2x, angular



UKE125 V are hinged cover compact single outlets consisting of a floor socket, a height-adjustable single outlet and a formwork body. The square construction elements are inserted directly into the screed and are used to accommodate up to two installation devices and individual data jacks. In addition, M25 pipes can be routed through the perforated side walls of the floor socket. The single outlets are made of stainless steel (V2A) or brass and are suitable for use in dry-cleaned and damp-cleaned rooms with office traffic loads. They are available with installation dimensions of 131 x 131 mm.



Products	H _{min}	N	E	P _{max}	IP _g	IP _n	weight
UKE125 15-V E	90 mm	35 mm	131 x 131 mm	2,00 kN	IP-20	IP-30	1,744 kg
UKE125 25-V E	100 mm	35 mm	131 x 131 mm	2,00 kN	IP-20	IP-30	1,965 kg
UKE125 25-V MS	100 mm	35 mm	131 x 131 mm	2,00 kN	IP-20	IP-30	2,243 kg

H_{min}: minimum installation height

N: levelling range

E: fitting dimension

P_{max}: maximum load





IP_g: IP protection level in used condition

IP_n: IP protection level in unused condition

DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

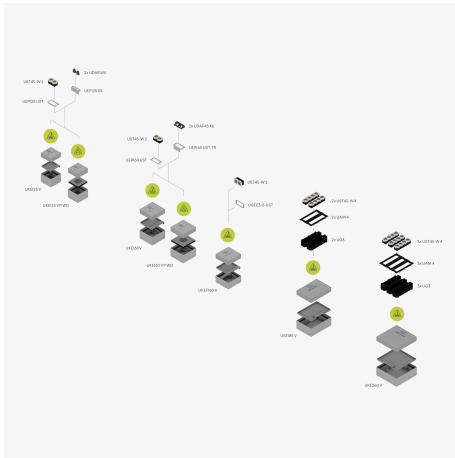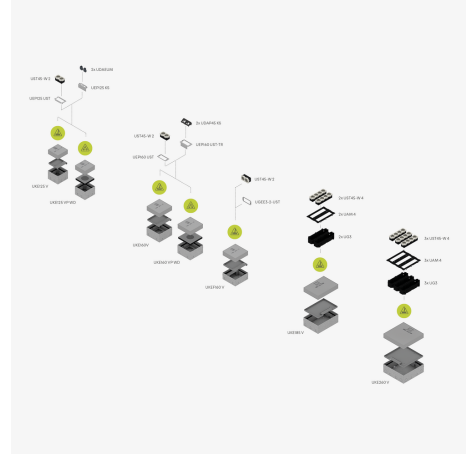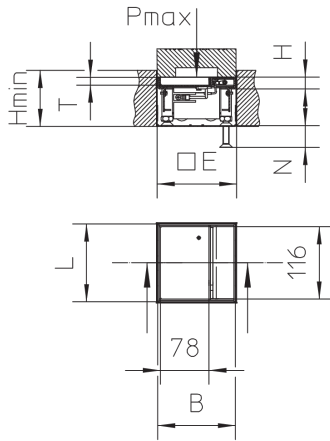

OPTIONAL ACCESSORIES

UEP125 KS, UEP125 UST, UEP125 B, UKENP 125



dry maintained



moistly maintained



Load requirements according to, DIN EN 50085

