


## UKE125 VP WD

Stainless steel tube cover compact single outlet, 2x, angular



UKE125 VP WD are tube cover compact single outlets consisting of a floor socket, a height-adjustable single outlet and a formwork body. The square components are inserted directly into the screed and are used to accommodate up to two installation devices and individual data jacks. In addition, M25 pipes can be routed through the perforated side walls of the floor socket. The outlets are made of flat stainless steel (V2A) and are suitable for use in wet-cleaned rooms with high traffic loads. They are available with installation dimensions of 131 x 131 mm.



Products	H <sub>min</sub>	N	E	P <sub>max</sub>	IP <sub>g</sub>	IP <sub>n</sub>	W
UKE125 15-VP-WD	90 mm	35 mm	131 x 131 mm	20,00 kN	IP 22	IP 54	2,508 kg

**H<sub>min</sub>**: minimum installation height

**N**: levelling range

**E**: fitting dimension



**P<sub>max</sub>**: maximum load

**IP<sub>g</sub>**: IP protection level in used condition

**IP<sub>n</sub>**: IP protection level in unused condition

**W**: Weight per storage unit

## DETAIL AND APPLICATION IMAGES

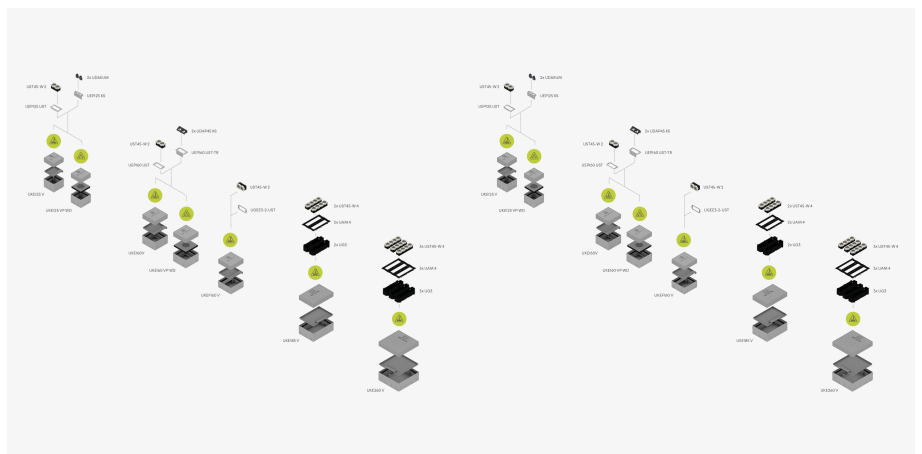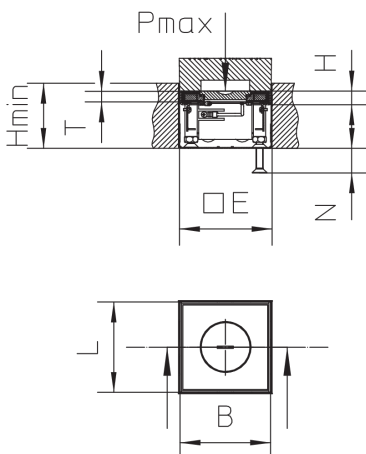

## OPTIONAL ACCESSORIES

UEP125 KS, UEP125 UST, UEP125 B, UET WD, UKENP 125



wet maintained



Load requirements according to, DIN EN 50085

