


UKE160 V

Stainless steel hinged cover compact single outlet, 4-way, angular



UKE160 V are hinged cover compact single outlets consisting of a floor socket, a height-adjustable single outlet and a formwork body. The square components are inserted directly into the screed and are used to accommodate up to four installation devices. In addition, M25 pipes can be routed through the perforated side walls of the floor socket. The single outlets are made of stainless steel (V2A) or brass and are suitable for use in dry-cleaned and damp-cleaned rooms with office traffic loads. They are available with installation dimensions of 166 x 166 mm.



Products	H _{min}	N	E	P _{max}	IP _g	IP _n	W
UKE160 15-V E	90 mm	35 mm	166 x 166 mm	2,00 kN	IP 20	IP 30	2,397 kg
UKE160 25-V E	100 mm	35 mm	166 x 166 mm	2,00 kN	IP 20	IP 30	2,481 kg
UKE160 25-V MS	100 mm	35 mm	166 x 166 mm	2,00 kN	IP 20	IP 30	3,005 kg

H_{min}: minimum installation height

N: levelling range

E: fitting dimension

P_{max}: maximum load



IP_g: IP protection level in used condition

IP_n: IP protection level in unused condition

W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



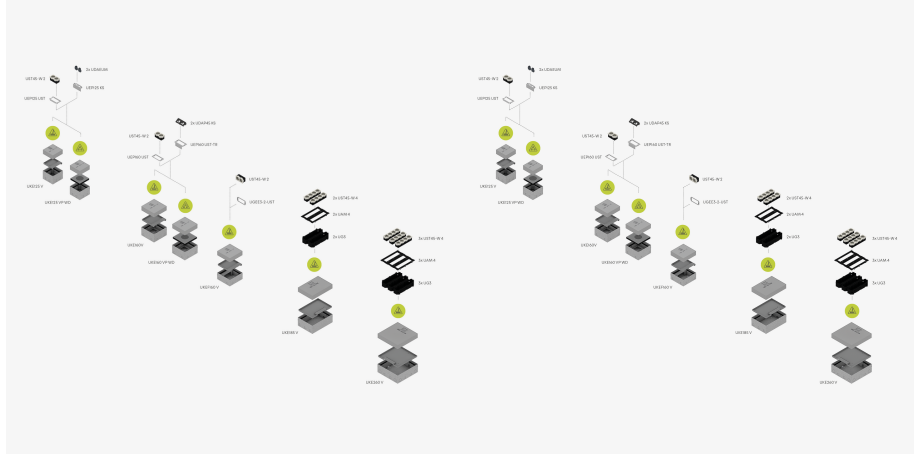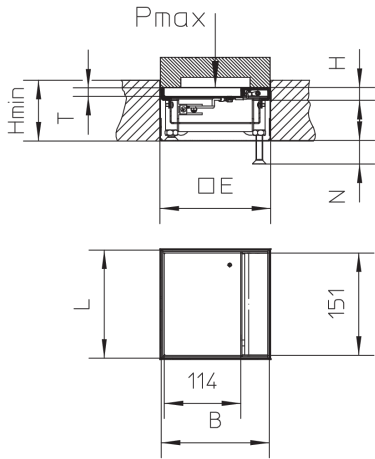

OPTIONAL ACCESSORIES

UEP160 UST, UEP160 UST-TR, UET WD, UKENP 160



dry maintained



moistly maintained



Load requirements according to, DIN EN 50085

