


UKE185 V

Stainless steel hinged cover compact single outlet, 8-way, angular





UKE185 V are hinged cover compact single outlets consisting of a floor socket, a height-adjustable single outlet and a formwork body. The square components are inserted directly into the screed and are used to accommodate up to eight installation devices. In addition, M25 pipes can be routed through the perforated side walls of the floor socket. The outlets are made of stainless steel (V2A) and are suitable for use in dry-cleaned and damp-cleaned rooms with office traffic loads. They are available with installation dimensions of 190 x 264 mm.



Products	H _{min}	N	E	P _{max}	IP _g	IP _n	weight
UKE185 15-V E	90 mm	35 mm	190 x 264 mm	2,00 kN	IP-20	IP-30	3,273 kg
UKE185 25-V E	100 mm	35 mm	190 x 264 mm	2,00 kN	IP-20	IP-30	3,650 kg

H_{min}: minimum installation height
N: levelling range
E: fitting dimension
P_{max}: maximum load
IP_g: IP protection level in used condition
IP_n: IP protection level in unused condition

DETAIL AND APPLICATION IMAGES

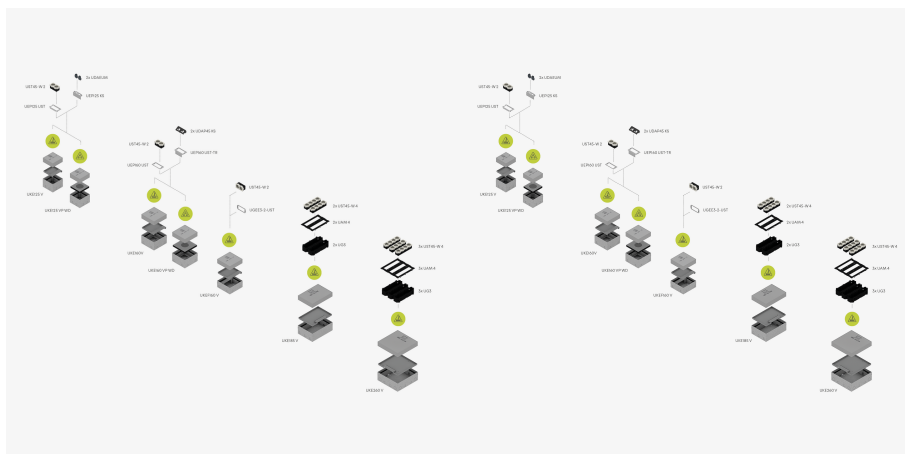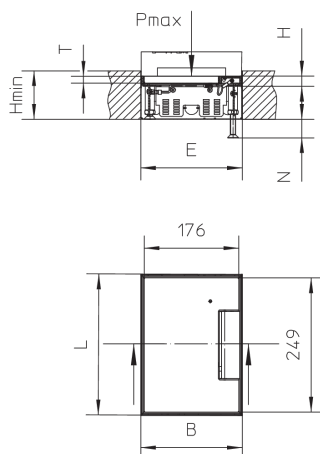

OPTIONAL ACCESSORIES

UG3, UKENP 185



dry maintained



moistly maintained



Load requirements according to, DIN EN 50085

