


## UM

### Mounting sleeve

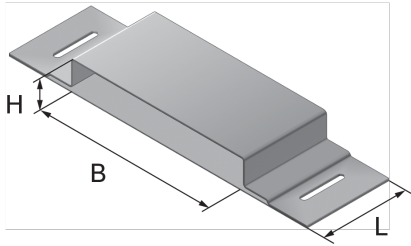

The UM component is a fixing sleeve that is placed between the duct sections when installing underfloor duct. The sleeves are used in expansion joints in raw concrete slabs and also to seal joints. They are made of sendzimir hot-dip galvanized sheet steel in accordance with DIN EN 10346. Additional accessories are optionally available.

steel, continuously hot galvanized/Sendzimir process

Products	H	B	L	W
UM 28-190S	28 mm	194 mm	82 mm	0,536 kg
UM 28-250S	28 mm	254 mm	82 mm	0,630 kg
UM 28-350S	28 mm	354 mm	82 mm	0,786 kg
UM 38-190S	38 mm	194 mm	82 mm	0,548 kg
UM 38-250S	38 mm	254 mm	82 mm	0,642 kg
UM 38-350S	38 mm	354 mm	82 mm	0,814 kg
UM 48-190S	48 mm	194 mm	82 mm	0,535 kg
UM 48-250S	48 mm	254 mm	82 mm	0,662 kg
UM 48-350S	48 mm	354 mm	82 mm	0,822 kg

**H:** height

**B:** width

**L:** length



**W:** Weight per storage unit

## DETAIL AND APPLICATION IMAGES



# PRODUCT INFORMATION

---

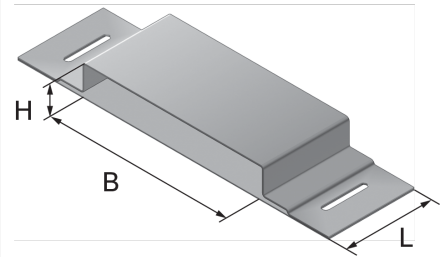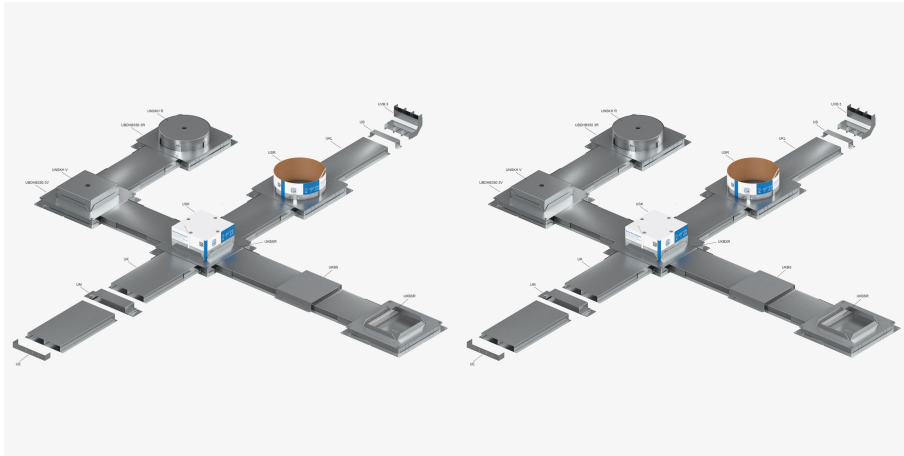

## OPTIONAL ACCESSORIES

UN

