

USR

Shuttering pipe, round




USR products are formwork pipes used in the installation of screed-covered underfloor duct systems. They are inserted into the UBDHB false floor sockets or UKDA assembly covers as lost formwork, where they form a fixed unit with the floor sockets. The pipes are removed again after the screed has hardened using an integrated ripcord. They are made of plastic-coated cardboard and have VDE/TUV approval. They are available in heights of 150 and 225 mm and diameters of 260 and 308 mm.




Products	H	D	W
USR 259-150	150 mm	260 mm	0,434 kg
USR 308-150	150 mm	308 mm	0,470 kg
USR 308-225	225 mm	308 mm	0,670 kg

H: height
D: diameter
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

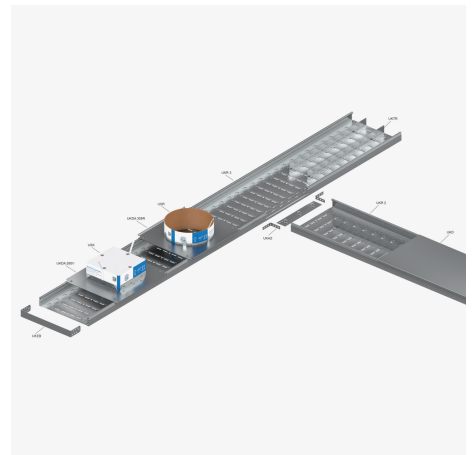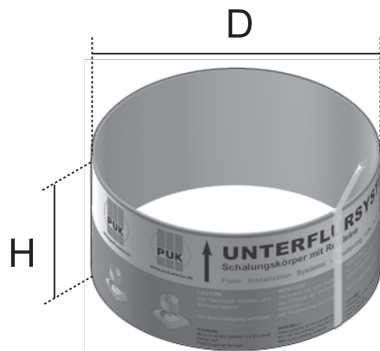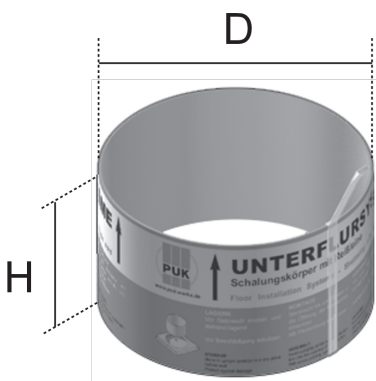

PRODUCT INFORMATION

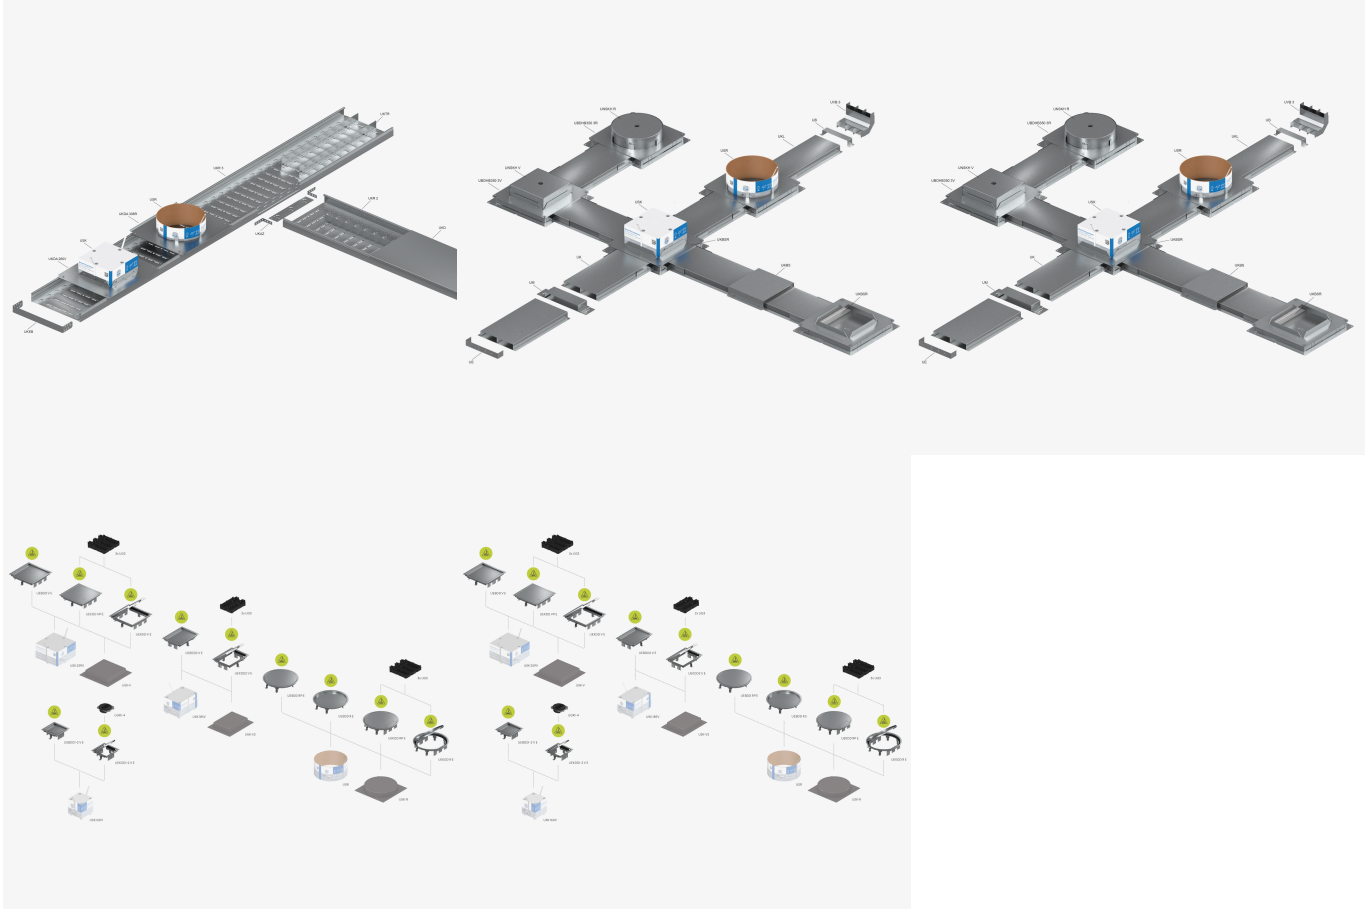

Load requirements according to, DIN EN 50085

